

SELECTED PARAMETERS CLASS A*

Electrical Safety CAT III

CE

*for selected parameters - details in the technical data

ND45

- POWER NETWORK ANALYZER / RECORDER

- Measurement and recording of over 500 electric energy quality parameters acc. to EN 50160, EN 61000-4-30, EN 61000-4-7 standards.
- **Measuring class A** - for 3 second aggregation **Urms**, **Irms**. 10 minute and 2 hour aggregation - class S.
- Operation in 3 or 4-wire, 3-phase, balanced or unbalanced power networks.
- Analysis of current and voltage harmonics and interharmonics up to the 51 st for class I (acc. to EN 61000-4-7).
- Flicker.
- 4-quadrant energy measurement **in 4 tariffs**.
- **Monitoring up to 6 additional energy meters with pulse output.**
- **Recording of measurements before and after events (dips & swells).**
- Configurable archives of actual values and events recording.
- Data archiving on an SD card - memory up to 32 GB.
- E-mail messages in case of alarm occurs,
- Web server (HTTP protocol), FTP server, DHCP client.
- Interfaces: **RS-485 Modbus Slave**, Ethernet 100 Base-T (Modbus TCP/IP), USB Device & Host.
- Colour touch screen: LCD TFT 5.6", 640 x 480 pixels.
- IP65 protection grade from the frontal side.
- Synchronization of RTC clock with the NTP time server.

EXAMPLE OF APPLICATION

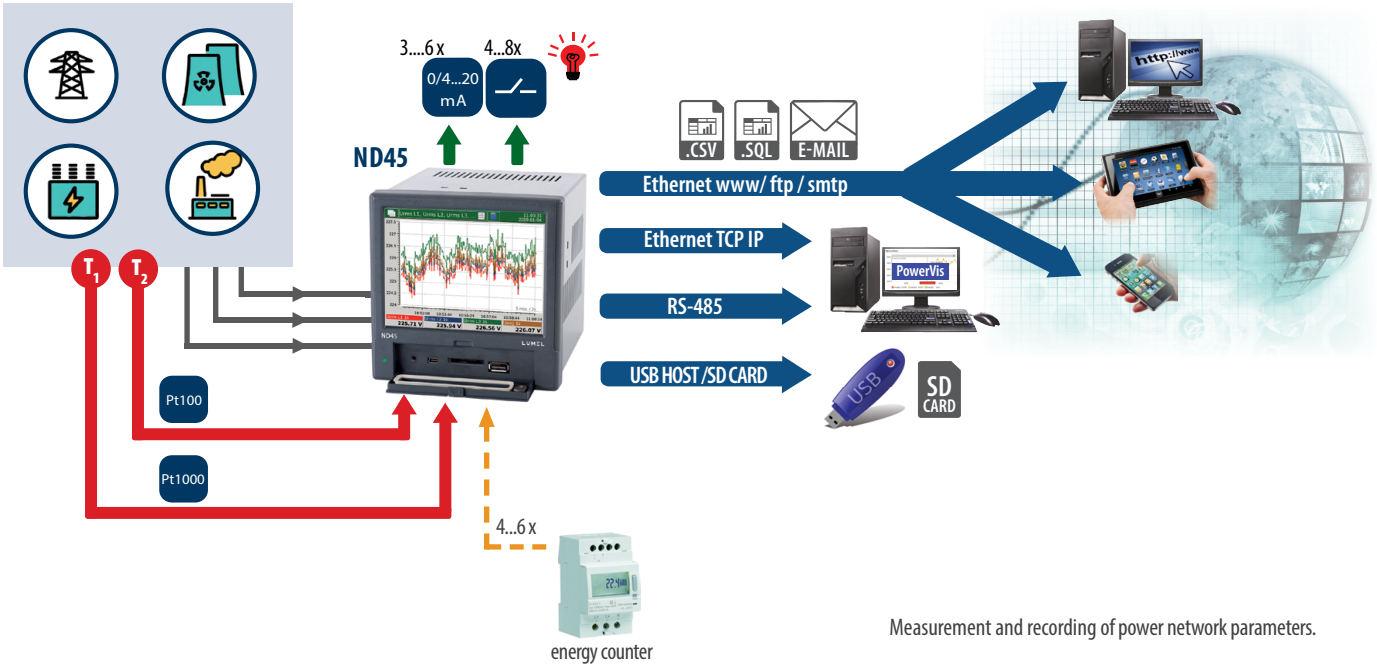

Measurement and recording of power network parameters.

ND45 - POWER NETWORK ANALYZER / RECORDER

MEASUREMENT AND VISUALIZATION OF POWER NETWORK PARAMETERS

Aggregated values for 3 seconds, 10 minutes and two hours:

- phase voltages U_1, U_2, U_3, U_{123}avg
- phase current I_1, I_2, I_3, I_{123}avg
- active phase powers P_1, P_2, P_3, ΣP_{123}, P_{123}avg
- reactive phase powers Q_1, Q_2, Q_3, ΣQ_{123}, Q_{123}avg
- apparent phase powers S_1, S_2, S_3, ΣS_{123}, S_{123}avg
- active power factors PF_1, PF_2, PF_3, PF_{123}avg
- power factor distortion dPF_1, dPF_2, dPF_3, dPF_{123}avg
- reactive/active power factors $tg\varphi_1$, $tg\varphi_2$, $tg\varphi_3$, $tg\varphi_{123}$avg
- phase-to-phase voltages U_{12}, U_{31}, U_{23}, U_{123}avg
- current in neutral wire I_n
- the angle between the voltage and current φ_1, φ_2, φ_3, φ_1, φ_{123}avg (degrees and radians)
- voltage phase-to-phase angle $\sphericalangle U_{12}$, $\sphericalangle U_{31}$, $\sphericalangle U_{23}$, $\sphericalangle U_{123}$avg

Other parameters:

- frequency (aggregation for 1 and 10 seconds)
- temperature/ resistance values (two channels)
- Demand values: P, Q , S , U , I (15-minute, 30-minute or 1 hour).
- energy: active imported/exported, reactive imported/exported and apparent. All energies are calculated for each phase and 3-phase parametres.
- factors: THD, THDS, THDG, PWHD. Calculated for currents and voltages of each phase and 3-phase parameters.
- harmonics from 1 up to 51st for each phase of currents and voltages
- interharmonics from 1 up to 51st for each phase of currents and voltages
- the half wave voltage of each phase
- recording of dips, swells and overvoltages
- storage of minimun and maximum of measured values.

FEATURES



INPUTS



OUTPUTS



GALVANIC ISOLATION



TECHNICAL DATA

INPUTS

Input type	Measuring range			Parameters	Basic error
Voltage input	230/400 V	57,7/100V	69.3/ 120 V	0.05..1.5 Un	± 0.1%
Current input	1 A or 5A			0.005..1.5 In	± 0.1%
Logic input	4 or 6 logic inputs: 0/5..24 V d.c.			switching frequency up to 50 Hz	
Input for temperature measurement	2 inputs: Pt100 (-200...850°C) lub Pt1000 (-200...850°C) , resistance: 0...5000 Ω				± 0.2%

OUTPUTS

Output type	Properties
Analog output	3 or 6 programmable current outputs 0/4...20 mA, load resistance < 500 Ω
Relay output	4 or 8 programmable electromagnetic relays, voltageless NO contacts, load capacity 250 V a.c./1 A a.c.

DIGITAL INTERFACES

Interface type	Properties
RS-485	interface: Modbus Slave, baud rate 300…115200 bit/s, transmission mode ASCII/RTU
USB	2 interfaces: Device & Host, USB v.2.0
Ethernet	100 Base-T, RJ45 socket, Modbus TCP/IP, web server (HTTP), FTP server, DHCP client

RATED OPERATING CONDITIONS

Supply voltage	85 V..253 V a.c., 40...400Hz	90 V..300 V d.c.	power consumption: 15 VA, 35 VA (when loading)
Ambient temperature	work: 0 up to 50°C		storage: - 20...50°C
Relative humidity	< 75%		Condensation inadmissible
Reaction against	supply decays		Data and device state preservation
	supply recovery		Continuation of device work
Short term load (5s)	2 Un (max. 1000 V)		10 In
Casing protection grade	IP 65		
Safety requirements	Installation category III		EN 61010-1
	Pollution grade 2		
Maximum phase-to-earth operating voltage	RS485, temperature/resistance input, USB: 50V		EN 61010-1
	measuring circuit, relays, supply: 300 V		

MEASURING RANGES AND ADMISSIBLE BASIC CONVERSION ERRORS

Measuring quantity	Measurement method	Range	Basic error
Voltage U RMS	**U RMS** averaged values: 1 s class: B 3 s class: A 10 min class: S 2 hrs class: S	U RMS L-N (150% Un) Un = 230 V 23.0..46..345.0 V (Ku=1) ..1.38 MV (Ku≠1) Un = 57.7V 5.7..11.5 ..86.5 V (Ku=1) ..280 kV (Ku≠1) Un = 69.3V 6.9..13.9 ..104.0 V (Ku=1) ..416 kV (Ku≠1) U RMS L-L (150% Un): Un = 400 V 40.0..80.. 600.0 V (Ku=1) ..2.4 MV (Ku≠1) Un = 100V 10.0 ..20..120.0 V (Ku=1) ..480 kV (Ku≠1) Un = 120V 12.0 ..24..180.0 V (Ku=1) ..720 kV (Ku≠1)	**class A** acc. to EN 61000-4-30:2008 **U RMS L-N** (10% Udin - 150% Udin): ±0.1% Udin.
Current I RMS	**I RMS**: averaged values: 1 s class: B 3 s class: A 10 min class: S 2 hrs class: S	**I RMS (150% In)**: In = 1 A - 0.010..0.1..1.5 A (Ki=1) In = 5 A - 0.050..0.5..7.5 A (Ki=1) ..480.0 kA (Ki≠1)	**I RMS** (10% In - 150% In): ±0.1% of measurement
Frequency	Class S appointed from 10 or 12 cycles in 200 ms.	42.5 up to 57.5 Hz for 50 Hz a.c. of supply 51.0 up to 69.0 Hz for 60 Hz a.c. of supply	Class S acc. to EN 61000-4-30 ±0.050 Hz
	Class A appointed from 100 or 120 cycles in 10 s.		**Class A** acc. to EN 61000-4-30 ±0.010 Hz
Active, reactive and apparent power	**Active power:** Measured every 10 cycles (50 Hz) or 12 cycles (60 Hz) **Reactive power:** appointed from apparent and active power. **Apparent power:** appointed from value U RMS and I RMS.	Depends on voltage and actual ratio value.	acc. to EN 61557-12: Active power: ± 0.5% Pn Reactive power: ± 1% Qn Apparent power: ± 0.5% Sn

Measuring quantity	Measurement method	Range	Basic error
Active imported/exported energy, reactive imported/exported energy, apparent energy	Measured every 10 cycles (50 Hz) or 12 cycles (60 Hz). Separate measurement for exporten, imported **active and reactive energy**.	Depends on voltage and actual ratio value.	acc. to EN 61557-12: Active power: ± 0,5% Reactive power: ± 1% Apparent power: ± 2%
Active power factor, Power distortion factor	Active power factor : depends on U RMS, I RMS and active power. Power distortion factor depends on THD I.	-1,000 .. 0 .. 1,000	Power factor PF ± 0.01% Power distortion factor PFdist ± 0.05%
Harmonics of voltages and current	acc. to EN 61000-4-7, up to 51st harmonic Window: 10 cycles (for 50 Hz), 12 cycles (for 60 Hz). FFT: 4096 points	Voltage harmonics: 0.00 .. 100.00 % Current harmonics: 0.00 .. 100.00 %	Voltage harmonics – class II ± 5% Urdg if Urdg > 1% ± 0.05% Un if Urdg < 1% Current harmonics – class II ± 5% Urdg if Urdg > 3% ± 0.5% Un if Urdg < 3%
THD U, THD I, THDG U, THDG I, THDS U, THDS I, PWHD U, PWHD I	acc. to EN 61000-4-7, up to 51st harmonic Window: 10 cycles (for 50 Hz), 12 cycles (for 60 Hz). FFT: 4096 points	THD U: 0.00 .. 100.00 % THD I: 0.00 .. 100.00 % THDG U: 0.00 .. 100.00 % THDG I: 0.00 .. 100.00 % THDS U: 0.00 .. 100.00 % THDS I: 0.00 .. 100.00 % PWHD U: 0.00 .. 100.00 % PWHD I: 0.00 .. 100.00 %	THD U: ±5% (50/60Hz) THD I: ±5% (50/60Hz) THDG U: ±5% (50/60Hz) THDG I: ±5% (50/60Hz) THDS U: ±5% (50/60Hz) THDS I: ±5% (50/60Hz) PWHD U: ±5% (50/60Hz) PWHD I: ±5% (50/60Hz)

where:

Ku - voltage transformer ratio
Ki - current transformer ratio
Udin - declared input voltage

Urdg, Irdg - measurement values
Un, In, Pn, Qn - nominal values

EXAMPLES OF MEASURING DATA PRESENTATION

Various forms of data display:

- **digital display**
- **analog view,**
- **bargraphs,**
- **vector diagrams**
- **trends**
- **energy meter**
- **harmonics analysis**
- **energy meter.**

Screen system log files.

Screens log alarms.

Control panel.

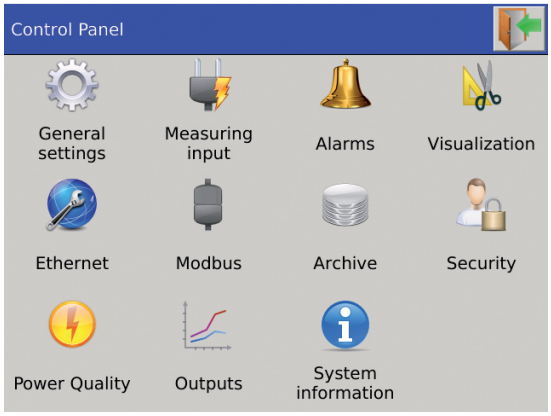

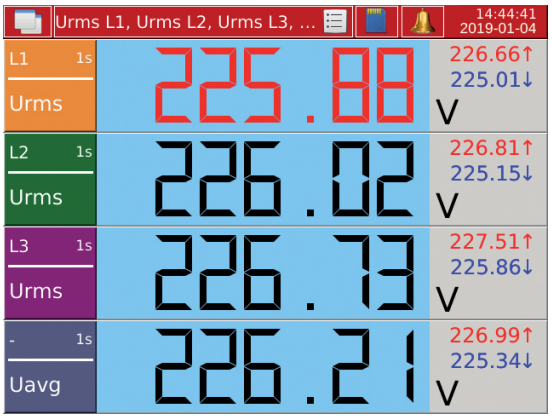

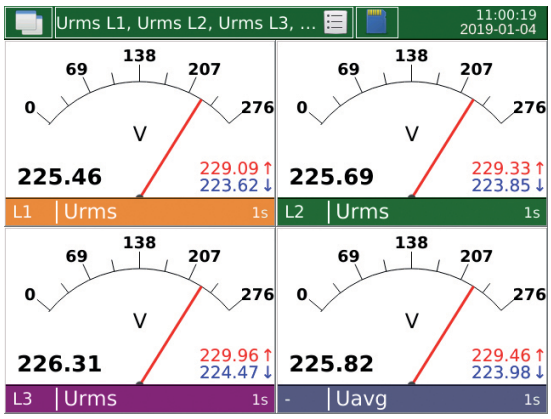

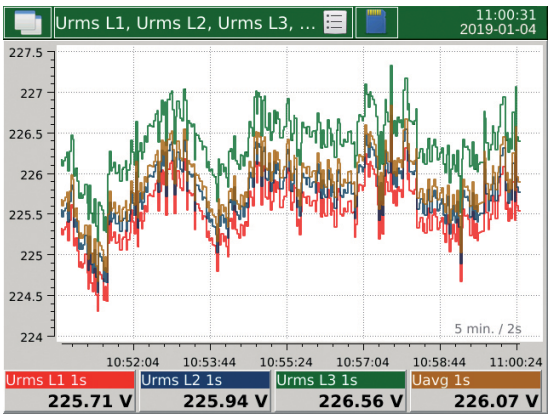

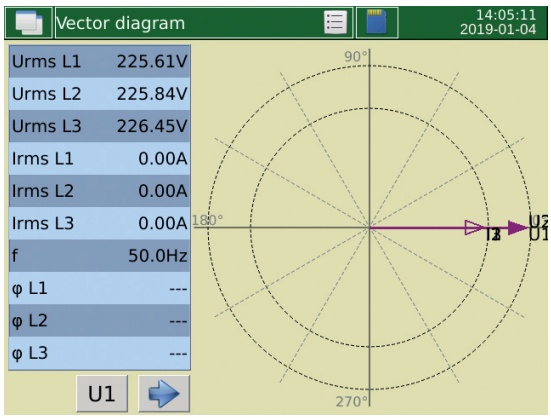

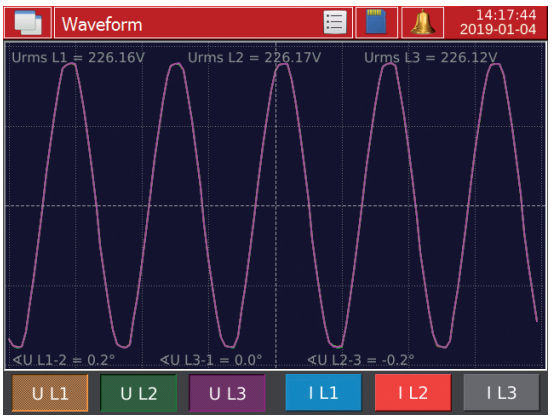

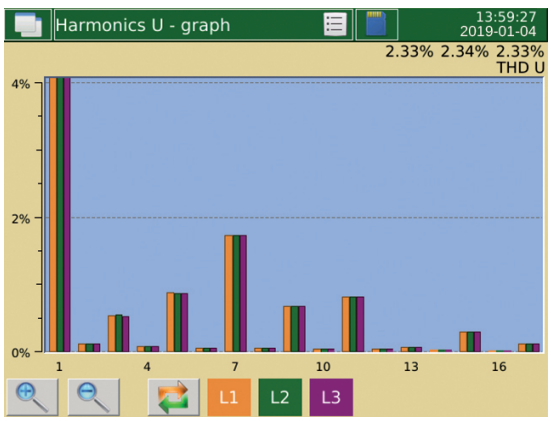

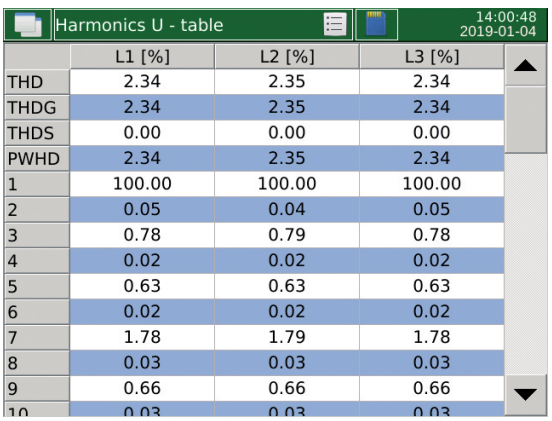

	L1 [%]	L2 [%]	L3 [%]
THD	2.34	2.35	2.34
THDG	2.34	2.35	2.34
THDS	0.00	0.00	0.00
PWHD	2.34	2.35	2.34
1	100.00	100.00	100.00
2	0.05	0.04	0.05
3	0.78	0.79	0.78
4	0.02	0.02	0.02
5	0.63	0.63	0.63
6	0.02	0.02	0.02
7	1.78	1.79	1.78
8	0.03	0.03	0.03
9	0.66	0.66	0.66
10	0.03	0.03	0.03

EXAMPLES OF MEASURING DATA PRESENTATION

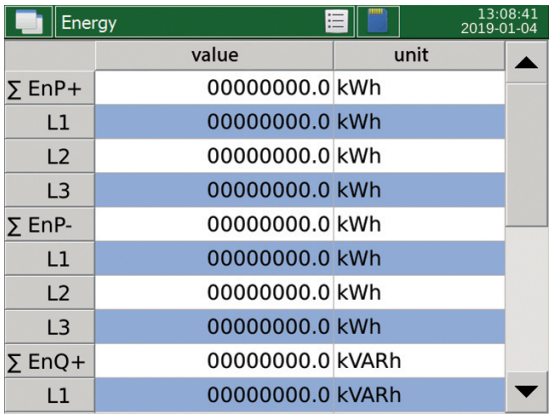

	value	unit
∑ EnP+	00000000.0	kWh
L1	00000000.0	kWh
L2	00000000.0	kWh
L3	00000000.0	kWh
∑ EnP-	00000000.0	kWh
L1	00000000.0	kWh
L2	00000000.0	kWh
L3	00000000.0	kWh
∑ EnQ+	00000000.0	kVARh
L1	00000000.0	kVARh

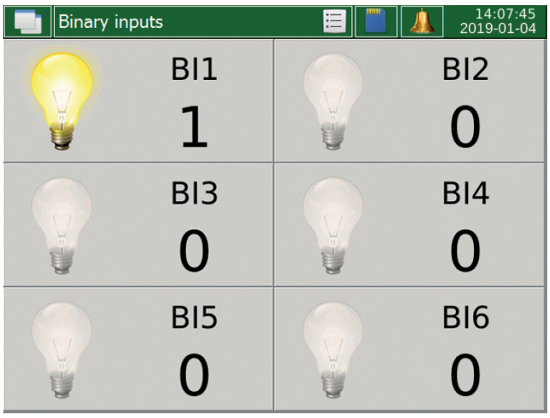

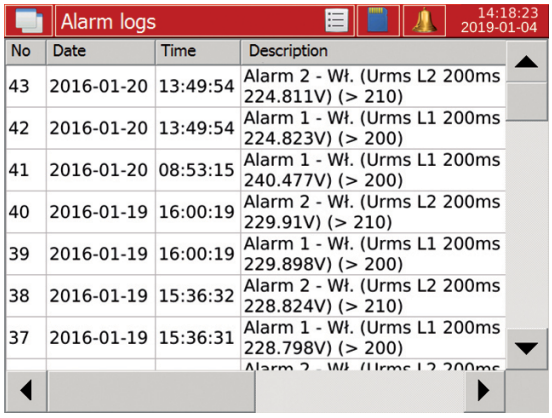

No	Date	Time	Description
43	2016-01-20	13:49:54	Alarm 2 - Wł. (Urms L2 200ms 224.811V) (> 210)
42	2016-01-20	13:49:54	Alarm 1 - Wł. (Urms L1 200ms 224.823V) (> 200)
41	2016-01-20	08:53:15	Alarm 1 - Wł. (Urms L1 200ms 240.477V) (> 200)
40	2016-01-19	16:00:19	Alarm 2 - Wł. (Urms L2 200ms 229.91V) (> 210)
39	2016-01-19	16:00:19	Alarm 1 - Wł. (Urms L1 200ms 229.898V) (> 200)
38	2016-01-19	15:36:32	Alarm 2 - Wł. (Urms L2 200ms 228.824V) (> 210)
37	2016-01-19	15:36:31	Alarm 1 - Wł. (Urms L1 200ms 228.798V) (> 200)

ETHERNET: **WWW SERVER, FTP**

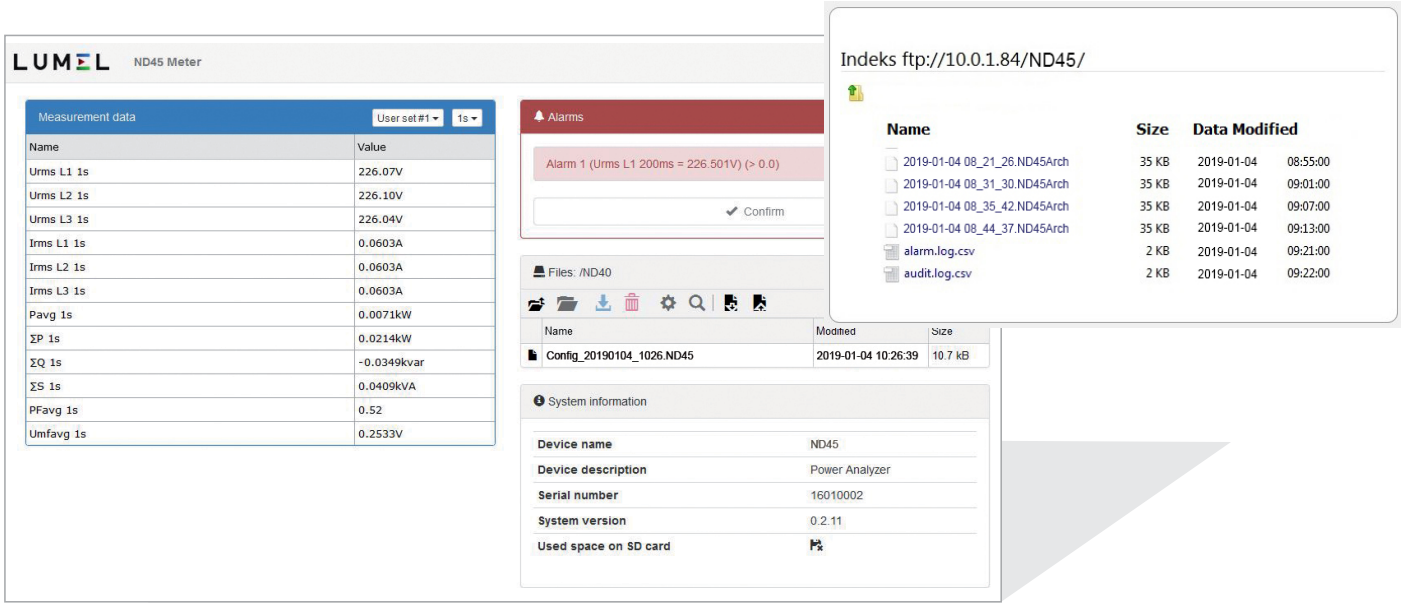

ND45 - POWER NETWORK ANALYZER / RECORDER

DIMENSIONS AND ASSEMBLY

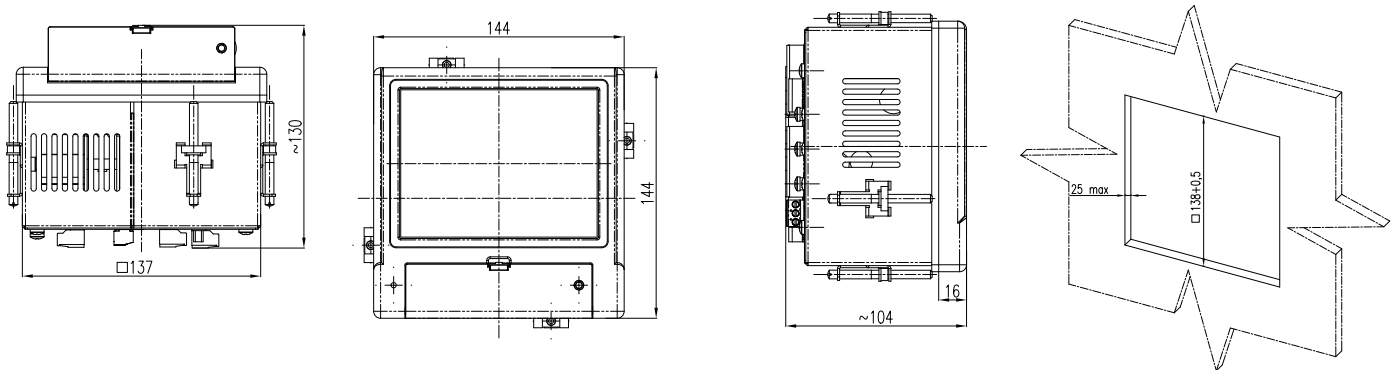

ORDERING CODE

Power network analyzer ND45	X	X	X	X	X	XX	X
Input voltage (phase/phase-to-phase) Un:							
3 x 57.7/100 V	1						
3 x 230/400 V	2						
3 x 69.3/120 V	3						
Inputs/ Outputs:							
whitout		0					
8 relay outputs		1					
6 logic inputs, 4 relay outputs		2					
6 logic inputs, 3 outputs 0/4-20 mA		3					
4 logic inputs, 6 outputs 0/4-20 mA		4					
Supply:							
85…253 V a.c., 90…300 V d.c.			1				
Measuring class:							
S class				0			
A/S class				1			
Language:							
Polish					P		
English					E		
Version:							
standard						00	
in a portable casing						01	
custom-made*						XX	
Acceptance tests:							
without additional quality requirements							0
with an extra quality inspection certificate							1
with an extra calibration certificate							2
acc.to customer's request							X

IN STANDARD:

- two temperature inputs Pt100 or Pt1000,
- RS-485 Modbus Slave,
- Ethernet.

ORDER EXAMPLE:

The code: **ND45 1 2 1 0 E 00 1** means:

ND45 - power network analyzer ND45 type
1 - input votlage 3 x 57,7/ 100 V
2 - 6 logic inputs, 4 relay outputs
1 - supply 85…253 V a.c., 90…300 V d.c.
0 - S mearusing class
E - english version
00 - standard version
1 -with an extra quality inspection certificate.

* only after agreeing with the manufacturer

Via Lirone 60/i, Castel Maggiore (BO) 40013
e-mail: info@eurotecsrl.com Website: www.eurotecsrl.com
Tel: +39 051/6321595 C.F. 04103780377 P.I. 01596581205