ABB MEASUREMENT & ANALYTICS | DATA SHEET

Model 261GC/GG/GJ/GM/GN and 261AC/AG/AJ/AM/AN

Gauge and Absolute transmitters with direct mount seal



Measurement made easy

Engineered solutions for all applications

Featuring remote seal with capillary tube
Base accuracy
- ± 0.1 %

Span limits
- 0.3 to 60000 kPa; 1.2 in H2O up to 8700 psi
- 0.3 to 10000 kPa abs; 2.25 mmHg up to 1450 psia

Proven sensor technology together with state-of-the-art digital technology
- Large turn down ratio of up to 20:1

Stainless steel housing
- Optimized for use in harsh ambient conditions
- Extremely robust

Flexible configuration options
- Local configuration via setup button for upper and lower range values
- Local configuration via buttons on LCD indicator
- Via handheld terminal or PC user interface

Large selection of versions, options, filling fluids
- High level of flexibility for hygienic applications or use at high temperatures

PED compliance to Sound Engineering Practice (SEP)

Product in compliance with Directive 2011/65/UE (RoHS II)

General description

For the transmitters 261Gx and 261Ax, process connections with flush diaphragms are available in a variety of designs and dimensions to meet the requirements of a wide range of sectors, including industries such as oil and gas, paper, chemicals, food and pharmaceuticals.

Special filling fluids are available for applications with high temperatures. For hygienic applications or use in the food industry, select filling fluids that are classified by the US Food and Drug Administration (FDA) as safe for use with food.

Functional specification

Measuring range limits and span limits

Sensor code	Measuring range upper limit (URL)	Measuring range lower limit (LRL) Model 261GS	Minimum measuring span (sensor limit values)	Overload limits
C	6 kPa 60 mbar 24 inH_2O	-6 kPa -60 mbar 24 inH_2O	0,3 kPa 3 mbar 1,2 inH_2O	1 MPa 10 bar 145 psi
F	40 kPa 400 mbar 160 inH_2O	-40 kPa -400 mbar -160 inH_2O	2 kPa 20 mbar 8 inH_2O	1 MPa 10 bar 145 psi
L	250 kPa 2500 mbar 1000 inH_2O	0 abs	12,5 kPa 125 mbar 50 inH_2O	0,5 MPa 5 bar 72,5 psi
D	1000 kPa 10 bar 145 psi	0 abs	50 kPa 500 mbar 7,25 psi	2 MPa 20 bar 290 psi
U	3000 kPa 30 bar 435 psi	0 abs	150 kPa 1,5 bar 21,7 psi	6 MPa 60 bar 870 psi
1	4000 kPa 40 bar 580 psi	0 abs	200 kPa 2 bar 29 psi	8 MPa 80 bar 1160 psi
R	10000 kPa 100 bar 1450 psi	0 abs	500 kPa 5 bar 72,5 psi	20 MPa 200 bar 290 psi
V	60000 kPa 600 bar 8700 psi	0 abs	3000 kPa 30 bar 435 psi	90 MPa 900 bar 13050 psi-

NOTE
The measuring range lower limit (LRL) for model 261A is 0 absolute for all measuring ranges.

Span limits

Maximum span = measuring range upper limit (URL)
To optimize performance characteristics, it is recommended that you select the transmitter sensor code with the lowest turn down ratio.
TURNDOWN = Upper range limit/set span

Damping

Configurable time constant between 0 and 60 s.
This is in addition to the sensor response time, and can be adjusted via the optional LCD indicator, handheld terminal, or PC user interface.

Warm-up time

Ready for operation as per specifications in less than 10 s with minimum damping.

Insulation resistance

>100 MΩ at 500 V DC (between terminals and ground).

Zero suppression and elevation

The zero position and span can be set to any value within the measuring range limits listed in the table if:
— Set span ≥ minimum span

Operating limits

Pressure limits

The maximum permissible pressure depends on the permissible sensor overload (refer to table "Measuring range limits and span limits") and the permissible working pressure for the process connection according to the order information.

Filling fluids (applications)	ID	Pressure in kPa abs			
		20 °C (68 °F)	100 °C (212 °F)	150 °C (302 °F)	180 °C (356 °F)
Silicone oil	IL	> 0,5	> 0,5	> 1,5	> 4.5
Fluorocarbon	G5	> 0.21	> 3,5	> 32,5	-
White oil	WB	> 50	> 100	> 100	> 100
Silicone oil for vacuum applications	IL-V	> 0,07	> 0,07	> 0.5	> 1.8
White oil for vacuum applications	WB-V	> 0,5	> 2,5	> 5.0	> 60

Temperature limits °C (°F)

Environment

Model 261GC, 261AC	Ambient temperature limits
Operating temperature range	-40 to 85 °C (-40 to 185 °F)
White oil filling	-6 to 85 °C (21 to 185 °F)
LCD display	-20 to 70 °C (-4 to 158 °F)

NOTE
For applications in potentially explosive atmospheres, the temperature range specified on the relevant certificate/ approval must be observed.

Storage

Model 261GC, 261AC	Storage temperature range
Storage temperature range	-50 to 85 °C (-58 to 185 °F)
White oil filling	-6 to 85 °C (21 to 185 °F)
LCD display	-40 to 85 °C (-40 to 185 °F)

Model 261GC, 261AC	Humidity during storage
Relative humidity	Up to 75 %

Filling fluids	ID	Density at 20 °C in kg/m³	Process temperature in °C at maximum ambient temperature	
			40 °C	60 °C
Silicone oil	IL	935	-30 to 180	-30 to 140
Fluorocarbon	G5	1830	-30 to 150	-30 to 140
White oil	WB	849	-6 to 180	-6 to 140
Silicone oil for vacuum applications	IL-V	935	-30 to 180	-30 to 140
White oil for vacuum applications	WB-V	849	-6 to 180	-6 to 140

Electromagnetic compatibility (EMC)

The devices conform to the requirements and tests for EMC Directive 2014/30/UE, as well as EN 61000-6-3 concerning emitted interference and EN 61000-6-1, EN 61000-6-2 concerning interference immunity.
The devices fulfill NAMUR recommendations.

Pressure Equipment Directive (PED)

The devices meet the requirements of Directive 2014/68/ UE, following Sound Engineer Practice (SEP).

Humidity

Relative humidity: Up to 100 %
Condensation, icing: Permissible

Vibration resistance

Acceleration up to 2 g at frequencies of up to 1000 Hz (according to IEC 60068-2-6).

Shock resistance

Acceleration: 50 g
Duration: 11 ms (according to 60068-2-27)

Humid and dusty atmospheres (degree of protection)

The transmitter is dust and sand-tight, and is protected against immersion effects as defined by the following standards:

- IEC EN60529 with IP 67 (with IP 68, IP 69K on request)
- NEMA 4X
- JIS C0920

IP65 degree of protection with plug connection

ATEX transmitter with type of protection "intrinsic safety Ex ia/ib" in accordance with Directive 2014/34/UE

Transmitter with 4 to 20 mA output signal and HART communication	
Certificate no.	PTB 05 ATEX 2032
Labeling	II 1/2 G Ex ia IIC T4 to T6 Ga/Gb II 2 G Ex ib IIC T4 to T6 Gb

Permissible ambient temperature range according to temperature class:	
Ambient temperature	**Temperature class**
-40 to 85 °C (-40 to 185 °F)	T1 to T4
-40 to 71 °C (-40 to 159 °F)	T5
-40 to 56 °C (-40 to 132 °F)	T6

Or

Labeling	II 1/2 D Ex ia IIIC T66 °C or T95 °C Da/Db II 2 D Ex ib IIIC T66 °C or T95 °C Db	II 1/2 D IP65 T95 °C Ex ia D II 2 D IP65 T95 °C Ex ib D

Permissible ambient temperature range:
-40 to 85 °C (-40 to 185 °F)

Supply and signal circuit with "Intrinsically safe Ex ia/ib IIB/IIC" type of protection", with the following maximum values	
	U_i = 30 V
	I_i = 130 mA
	P_i = 0.8 W
Effective internal capacitance	C_i = 10 nF
Effective internal inductance	L_i = 0.5 mH

IECEx transmitter with the following types of protection: "intrinsic safety ia", "non sparking nA" and "dust ignition protection by enclosure tb"

Transmitter with 4 to 20 mA output signal and HART communication	
Certificate no.	IECEx ZLM 10.0002
Labeling	Ex ia IIC T6 bzw. T4 Ga/Gb Ex ia IIIC T66°C bzw. T95°C Da/Db Ex nA IIC T6 bzw. T4 Gc Ex tb IIIC T66°C bzw. T95°C Db

Maximum permissible ambient temperature range according to temperature class		
Ambient temperature	**Temperature class**	**Surface temperature**
-40 to 85 °C (-40 to 185 °F)	T4	95 °C (203 °F)
-40 to 56 °C (-40 to 133 °F)	T6	66 °C (151 °F)

Electrical data according to designation Ex ia IIC T6 or T4 Ga/Gb and Ex ia IIIC T66°C or T95°C IP6X Da/Db

Supply and signal circuit with "intrinsic safety" Ex ia or Ex ib type of protection, for connection to power supply units with the following maximum values (terminal signal ±)	
	U_i = 30 V
	I_i = 130 mA
	P^i = 0.8 W
Effective internal capacitance	C_i = 10 nF
Effective internal inductance	L_i = 0.5 mH

If the transmitter is being integrated into a partition between equipment protection level Ga or Da and a lower protection level, the transmitter must be supplied with power by an Ex ia intrinsically safe circuit.
Electrical data according to designation Ex nA IIC T6 or T4 Gc and Ex tb IIIC T66°C or T95°C IP6X Db

	$I_N \leq 22{,}5$ mA
	$U_N \leq 45$ V

...Operating limits

Factory Mutual (FM)

Transmitter with 4 to 20 mA output signal and HART communication	
Intrinsic Safety	Class I; II and III; Division 1; Groups A, B, C, D; E, F, G Class I; Zone 0; AEx ia Group IIC T6; T4
Non-incendive	Class I, II, III, Division 2; Groups A, B, C, D, F, G
Degree of protection	NEMA type 4X (indoor and outdoor installation)

Canadian Standards Association (CSA)

Transmitter with 4 to 20 mA output signal and HART communication	
Intrinsic Safety	Class I; II and III; Division 1; Groups A, B, C, D; E, F, G Class I; Zone 0; Group IIC T6; T4
Non-incendive	Class I, II, III; Division 2; Groups A, B, C, D; F, G
Degree of protection	NEMA type 4X (indoor and outdoor installation)

Permissible ambient temperature range according to temperature class:			
	U_i max. = 30 V; I_i max = 130 mA; P_i = 0,8 W; C_i = 10 nF; L_i = 0,5 µH		
Ex ia II CT1 to T6	T6	T5	T1 to T4
	-40 to 56 °C	-40 to 71 °C	-40 to 85 °C

Intrinsic safety	Gas and dust, order code X4
Degree of protection	Ex ia II CT1~T6; DIP A20 TA 95 °C

Electrical data and options

HART digital communication and 4 to 20 mA output

Power supply

The transmitter operates from 11 to 42 V DC with no load and is protected against reversed polarity (additional loads enable operation above 42 V DC).
During use in Ex ia zones and in other intrinsically safe applications, the power supply must not exceed 30 V DC.

Ripple

Maximum permissible supply voltage ripple during communication: Complies with HART FSK “Physical Layer” specification rev. 8.1.

Load limitations

Total loop resistance at 4 to 20 mA and HART:

$$R(k\Omega) = \frac{\text{Voltage supply} - \text{Minimum operating voltage (VDC)}}{23.6\ \text{mA}}$$

A minimum resistance of 250 Ω is required for HART communication

LCD display (optional)

Digital, graphic LCD display for customized visualization of:

- Gauge pressure/absolute pressure
- Output current in mA or %, or
- HART output (freely assigned start/end values and unit)

Diagnostic messages, alarms, errors, and measuring range upper limit violations are also displayed.
In addition, the LCD display can be used to configure and parameterize the transmitter using 4 buttons.

Output signal

Two-wire, 4 to 20 mA output.
HART® communication provides digital process variables (%, mA or engineering units) superimposed on the 4 to 20 mA signal (protocol according to Bell 202 FSK standard).

Output current limits (according to NAMUR standard)

Overload condition

- Lower limit: 3.8 mA (configurable up to 3.5 mA)
- Upper limit: 20.5 mA (configurable up to 23.6 mA)

Alarm current

- Minimum alarm current: 3.5 mA (configurable from 3.5 to 4 mA)
- Maximum alarm current: 21 mA (configurable from 20 to 23.6 mA)

Default setting: High Alarm Current

Measuring accuracy

Reference conditions according to IEC 60770

- Ambient temperature TU = constant in the range 18 to 30 °C (64 ... 86 °F)
- Relative humidity = constant in the range 30 to 80 %
- Ambient pressure PU = constant in the range 950 to 1,060 mbar.
- Measuring span based on zero position
- Transmitter with ceramic or Hastelloy separation diaphragm
- Filling fluid: Silicone oil
- Supply voltage: 24 V DC
- Load with HART: 250 Ω
- Transmitter not grounded
- Characteristic setting: linear, 4 to 20 mA.

Unless otherwise stated, errors are specified as a % of the measuring span value.
The accuracy of the measurement in relation to the upper range limit (URL) is affected by the turndown (TD); i.e., the ratio of the upper range limit (URL) to the set span (URL/span).

FOR OPTIMUM MEASURING ACCURACY, IT IS RECOMMENDED THAT YOU SELECT THE SENSOR CODE WHICH WILL PROVIDE THE LOWEST TD VALUE.

Dynamic response (according to IEC 612981)

Reaction time	100 ms
Time constant (63.2 % of total step response)	200 ms (for all sensors)

Measuring error for setting cut-off point

Percentage of set span, consisting of non-linearity, hysteresis, and non-reproducibility.

Turndown	Measuring error
1:1 to 10:1	± 0.1 %
>10:1	± (0.1 + 0.005 x TD - 0.05) %

Ambient temperature

Thermal change in ambient temperature as regards the zero signal and span (turndown up to 6:1), in relation to the set span

Temperature range	Maximum effect on zero signal and span
-10 to 60 °C (14 to 140 °F)	All measuring ranges ± (0.2 % x TD + 0.2 %)
-40 to -10 °C (-40 to 14 °F)	All measuring ranges ±((0.1 % / 10 K) x TD + (0.1 / 10K))
60 to 85 °C (140 to 185 °F)	

Temperature coefficient (Tk)

Effect of the ambient temperature per 10 K (but limited to the maximum effect of the temperature change, see previous information). The information refers to the set measuring span.

Temperature range	Effect on zero signal and span
-10 to 60 °C (14 to 140 °F)	Sensor code C, F: ± (0.15 % x TD + 0.15 %)
	Sensor code L, D, U, R, V: ± (0.05 % x TD + 0.05 %)

Temperature limit for white oil; refer to "Operating limits"

NOTE
Additional temperature effects that are dependent on the type and size of the process connection are provided in the dimension drawings for the remote seal.

Power supply

Within the specified limits for the voltage / load, the total influence is less than 0.001 % of the upper measuring range limit per volt.

Load

Within the specified load / voltage limits, the total influence is negligible.

Electromagnetic fields

Total influence is less than 0.3 % of measuring span from 80 to 1,000 MHz and for field strengths up to 10 V/m when tested with unshielded conduit, with or without meter.

Technical specification

(Please refer to the order information to check the availability of different versions of the relevant model)

Materials

Separation diaphragms[1]
See order information

Process connection[1]
See order information

Filling fluid for process connection
See order information

Sensor filling fluid
Silicone oil, inert filling (carbon fluoride), white oil (FDA)

Mounting bracket
Stainless steel

Sensor housing, electronics housing and cover
Stainless steel (1.4404 / 316L)

Filter for atmospheric ventilation
Filter housing: Plastic (standard), stainless steel (code EA, AB)
Filter material: Polyamide (PA)

Viewing window in cover (LCD display)
Polycarbonate, Makrolon 6557

Cover O-ring
EPDM

Name plate
Plastic data plate attached to the electronics housing

Calibration

Standard: 0 to upper range limit (URL)
Optional: To specified measuring span

Optional extras

LCD display
Can be rotated in 90° increments into 4 positions

Additional tag plates
Code I2: For measuring point tag (up to 30 characters) and calibration specifications (up to 30 characters: lower and upper value plus unit), attached to transmitter housing.
Code I1: For customer data (4 lines with 30 characters each), attached to transmitter housing with wire.

Cleaning stage for oxygen applications (O2)

Certificates (test, design, characteristics, material traceability)

Name plate and operating instruction language

Process connections

See order information.

Electrical connections

M16 x 1.5 tap hole with cable gland (cable diameter approx. 5 to 10 mm), directly on housing
or
M20 x 1.5 (via adapter) with cable gland (cable diameter approx. 6 to 11 mm)
or
1/2-14 NPT (via adapter) without cable gland
or
Harting Han plug connector (with mating plug (socket outlet, for wire diameters of 0.75 to 1 mm^2 and cable diameters of 5 to 11 mm))
or
Miniature plug connector (without mating plug (socket outlet))

Terminals
HART version:
Two connections for signal / auxiliary power, for wire cross-sections from 0.5 to 1.5 mm^2 (16 AWG)

Grounding (optional)
External ground terminals for wire cross-sections up to 4 mm^2 (12 AWG).

Weight
(without options)

- Approx. 0.7 kg (1.54 lb)
- Additional 650 g (1.5 lb)

Packaging
Carton with dimensions of approx. 240 x 140 x 190 mm (9.45 x 5.51 x 7.48 in.)

(1) Transmitter parts that come into contact with fluid

Configuration

Transmitter with HART communication and 4 to 20 mA

Standard configuration

Transmitters are set to the customer's specified span at the factory. The set range and measuring point number are provided on the name plate. If this data has not been specified, the transmitter will be delivered with the following configuration:

Parameter	Factory setting
4 mA	Zero position
20 mA	Measuring range upper limit (URL)
Output	Linear
Damping	0.1 s
Transmitter failure mode	21 mA
Opitional LCD display	0 to 100 %


Any or all of the configurable parameters listed above - including the upper and lower range values - can easily be changed using the optional LCD indicator, a HART handheld communicator, or a PC running the configuration software SMART VISION with DTM for 2600T.

Mounting dimensions

(not design data) - dimensions in mm (inch)

Standard design


Pressure transmitter

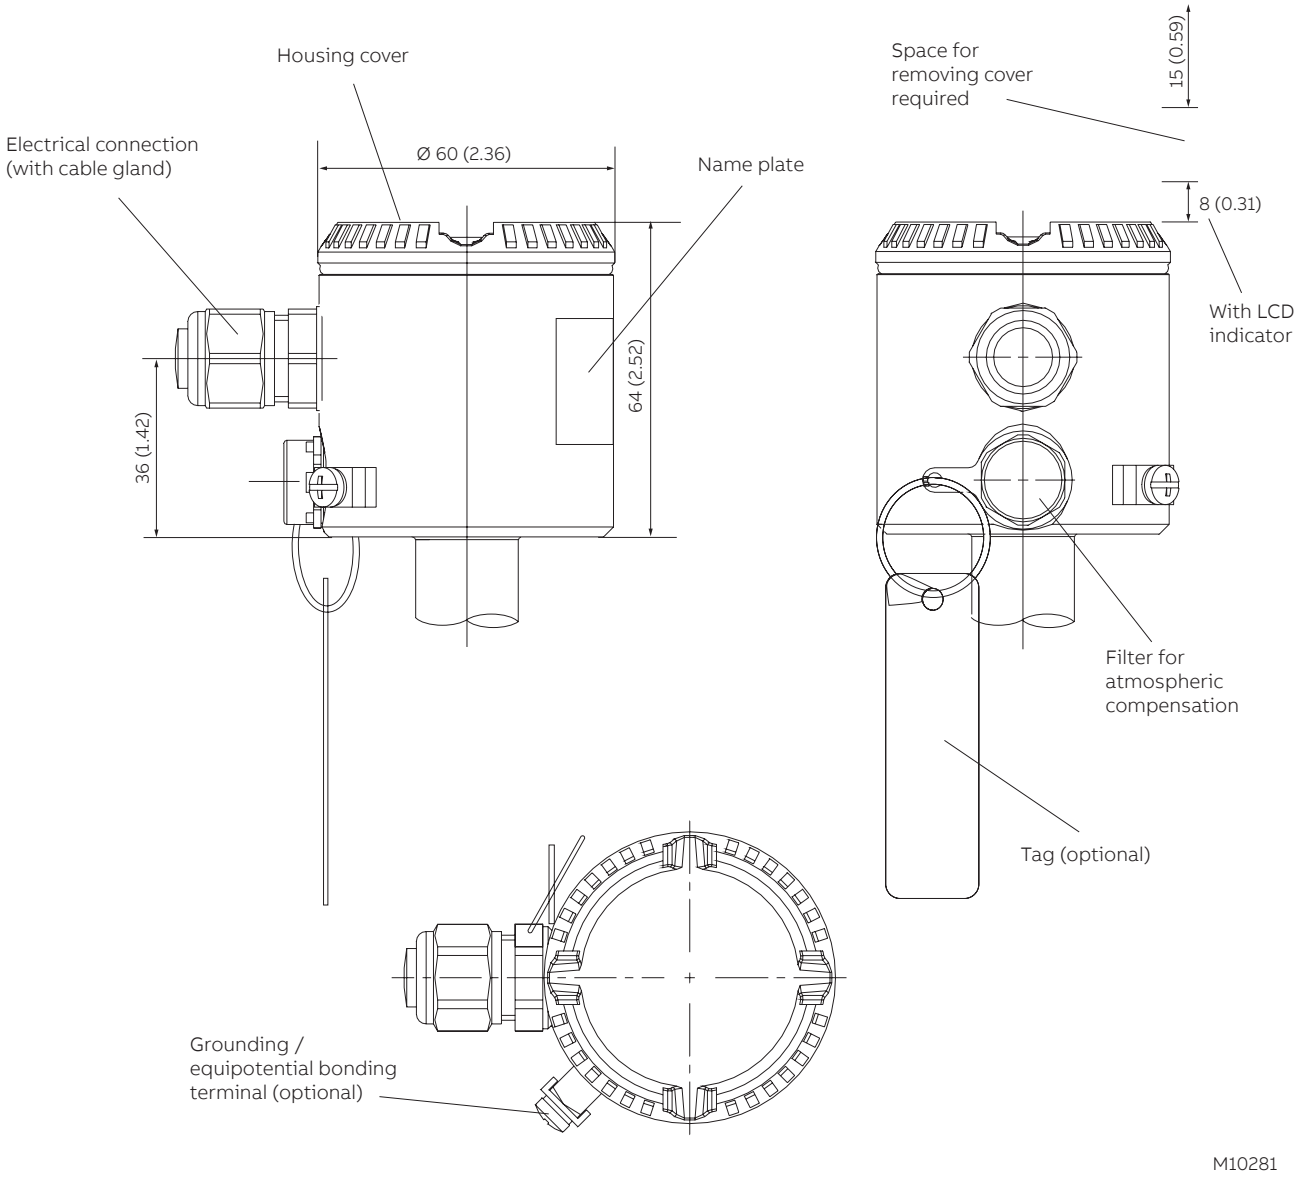

...Mounting dimensions

Dimensions in mm (inch)


Version with LCD indicator and Harting Han plug

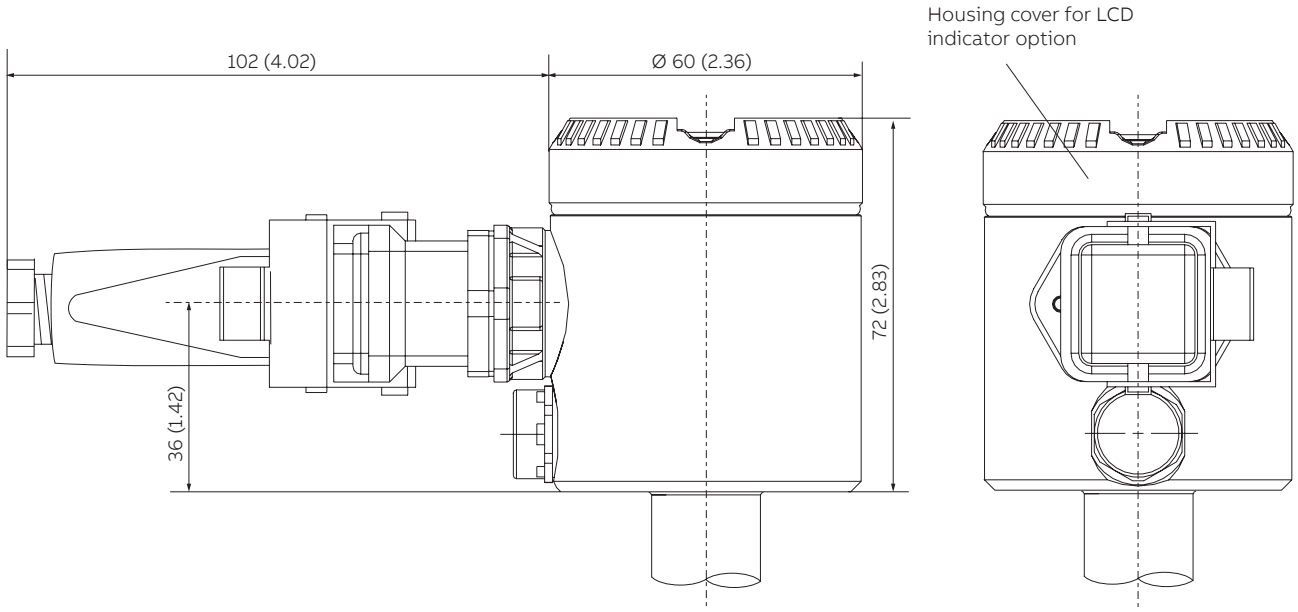

M10282

Model 261GC / AC


Flush diaphragm remote seal

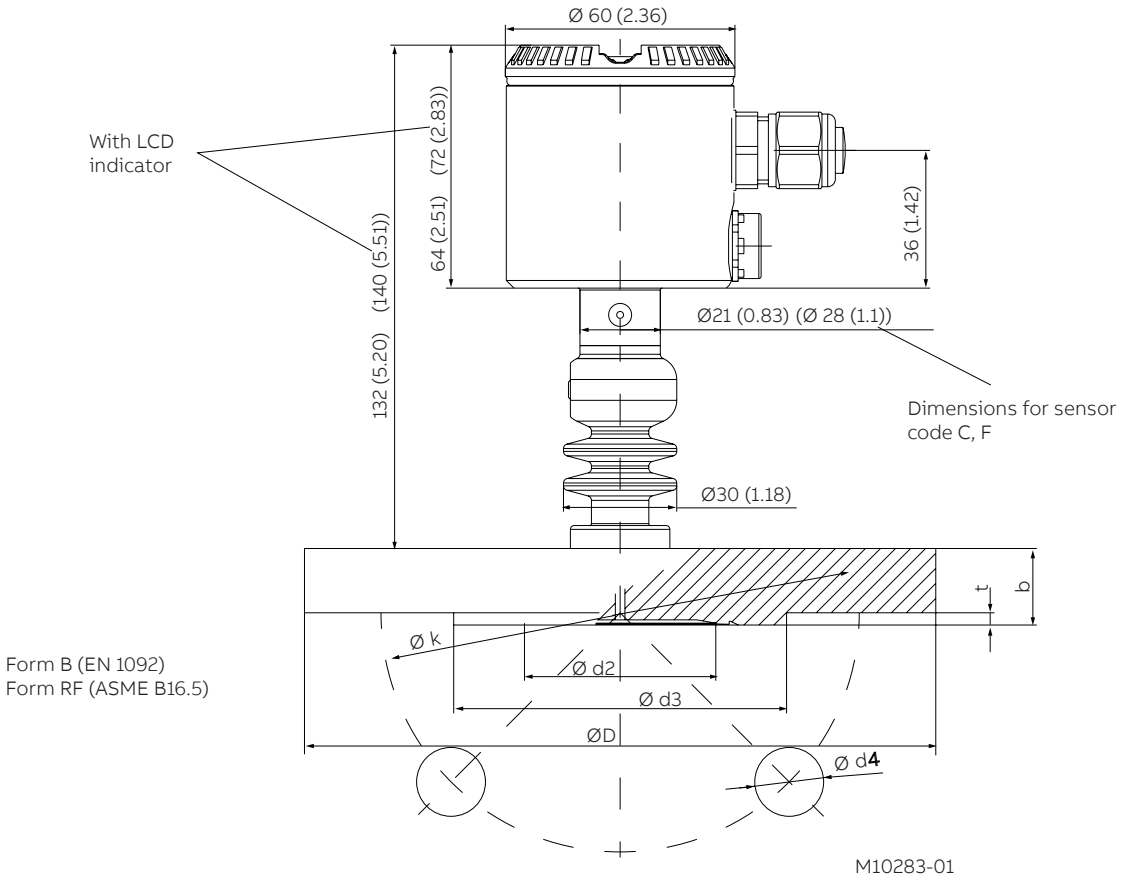

...Mounting dimensions


Dimensions in mm (inch)

Extended diaphragm remote seal

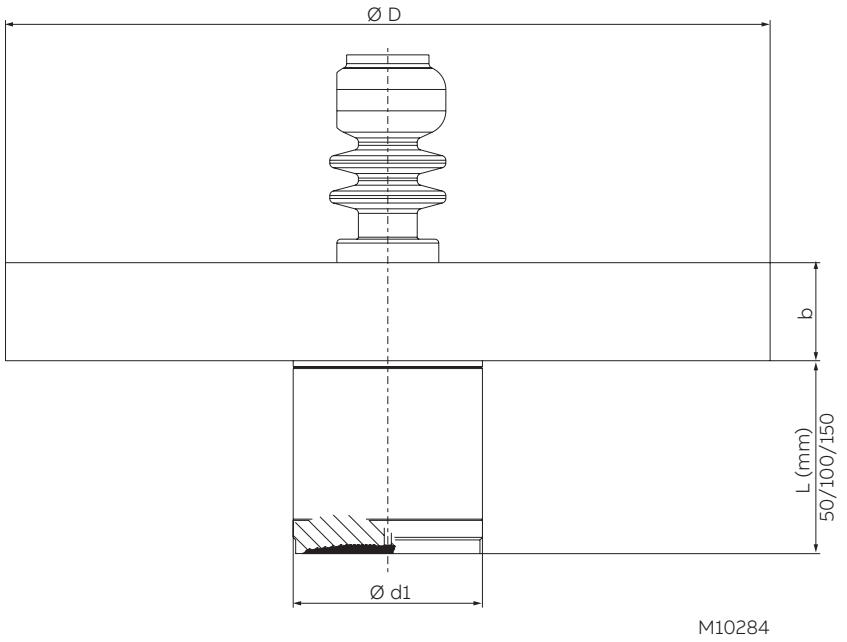


Sealing surfaces

Sealing surface with edge; Form E (EN 1092)

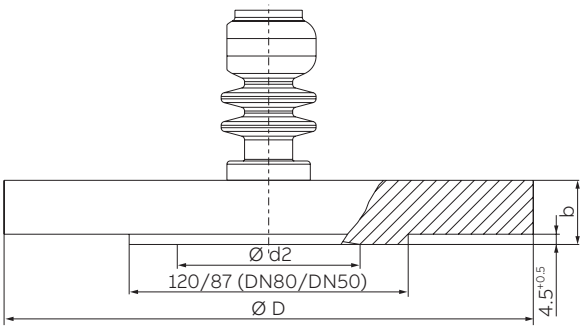

Sealing surface with groove; Form D (EN1092)

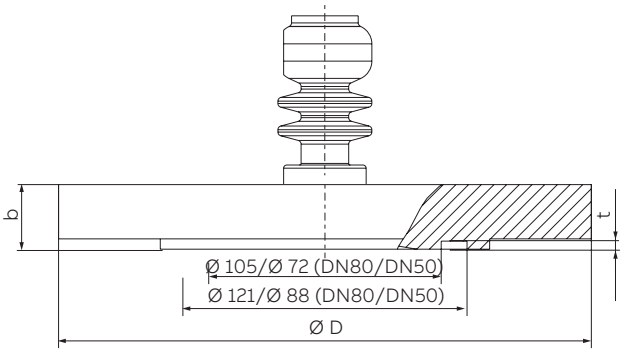

M10285

Sealing surface Form B, Form D, Form E (EN 1092), Form RF (ASME B16.5)

DN	PN	Ø D	Ø k	Ø d1	Ø d2	Ø d3	t Form B2, D, RF	b	Ø d4	Weight	
										Flush diaphragm	Extended diaphragm (tube)
25	PN 10 / 40	115 (4.53)	85 (3.35)	-	32 (1.26)	68 (2.68)	2	18 (0.71)	4 x Ø14		
50	PN 16 / 40 PN 63 PN 100	165 (6.50) 180 (7.09) 195 (7.68)	125 (4.92) 135 (5.31) 145 (5.71)	48,3 (1.9) 48,3 (1.9) 48,3 (1.9)	57 (2.24) 57 (2.24) 57 (2.24)	102 (4.02) 102 (4.02) 102 (4.02)	3 (0.12) 3 (0.12) 3 (0.12)	20 (0.79) 26 (1.02) 28 (1.10)	4 x Ø 18 4 x Ø 22 4 x Ø 26		
80	PN 16 / 40 PN 63 PN 100	200 (7.87) 215 (8.46) 230 (9.06)	160 (6.30) 170 (6.69) 180 (7.09)	73 (2.87) 73 (2.87) 73 (2.87)	75 (2.95) 75 (2.95) 75 (2.95)	138 (5.43) 138 (5.43) 138 (5.43)	3 (0.12) 3 (0.12) 3 (0.12)	24 (0.94) 28 (1.10) 32 (1.26)	8 x Ø 18 8 x Ø 22 8 x Ø 26		
1“	class 150 class 300	107,9 (4.25) 123,8 (4.87)	79,4 (3.13) 88,9 (3.5)	-	32 (1.26) 32 (1.26)	50.8 (2) 50.8 (2)	1,6 (0.06) 1,6 (0.06)	14,2 (0.56) 17,5 (0.69)	4 x Ø 15,7 4 x Ø 19,1		
2“	class 150 class 300 class 600	152,4 (6) 165,1 (6.5) 165,1 (6.5)	120,6 (4.75) 127 (5) 127 (5)	48,3 (1.9) 48,3 (1.9) 48,3 (1.9)	57 (2.24) 57 (2.24) 57 (2.24)	92.1 (3.63) 92.1 (3.63) 92.1 (3.63)	1.6 (0.06) 1.6 (0.06) 6.35 (0.25)	19,1 (0.75) 22,4 (0.88) 25,4 (1.0)	4 x Ø 19,1 8 x Ø 19,1 8 x Ø 19,1		
3“	class 150 class 300 class 600	190,5 (7.5) 209,5 (8.25) 209,5 (8.25)	152,4 (6) 168,3 (6.63) 168,3 (6.63)	73 (2.87) 73 (2.87) 73 (2.87)	75 (2.95) 75 (2.95) 75 (2.95)	127 (5) 127 (5) 127 (5)	1.6 (0.06) 1.6 (0.06) 6.35 (0.25)	22,2 (0.87) 28,4 (1.12) 31,8 (1.25)	4 x Ø 19,1 8 x Ø 22,4 8 x Ø 22,4		

...Mounting dimensions

Accuracy information


Process connection	Temperature effect for each 10 K (18 °F)				Recommended measuring span	
	Environment		Process			
	mbar	in H_2O	mbar	in H_2O	mbar	in H_2O
DN 25 Flush diaphragm	0,77	0,31	1,20	0,48	1000	401,5
DN 50 Flush diaphragm	0,075	0,03	0,4	0,16	100	40,15
DN 50 with tube	0,125	0,05	0,9	0,36	160	64,24
DN 80 Flush diaphragm	0,05	0,02	0,1	0,04	60	24,09
DN 80 with tube	0,05	0,02	0,1	0,04	60	24,09
1“ ASME Flush diaphragm	0,77	0,31	1,20	0,48	1000	401,5
2“ ASME Flush diaphragm	0,075	0,03	0,4	0,16	100	40,15
2“ ASME with tube	0,125	0,05	0,9	0,36	160	64,24
3“ ASME Flush diaphragm	0,05	0,02	0,1	0,04	60	24,09
3“ ASME with tube	0,05	0,02	0,1	0,04	60	24,09

Model 261GG / AG

Dimensions in mm (inch)

Average surface finish of surfaces coming into contact with the media: Ra ≤ 0.8 µm

Pressure transmitter with tri-clamp connection per ASME

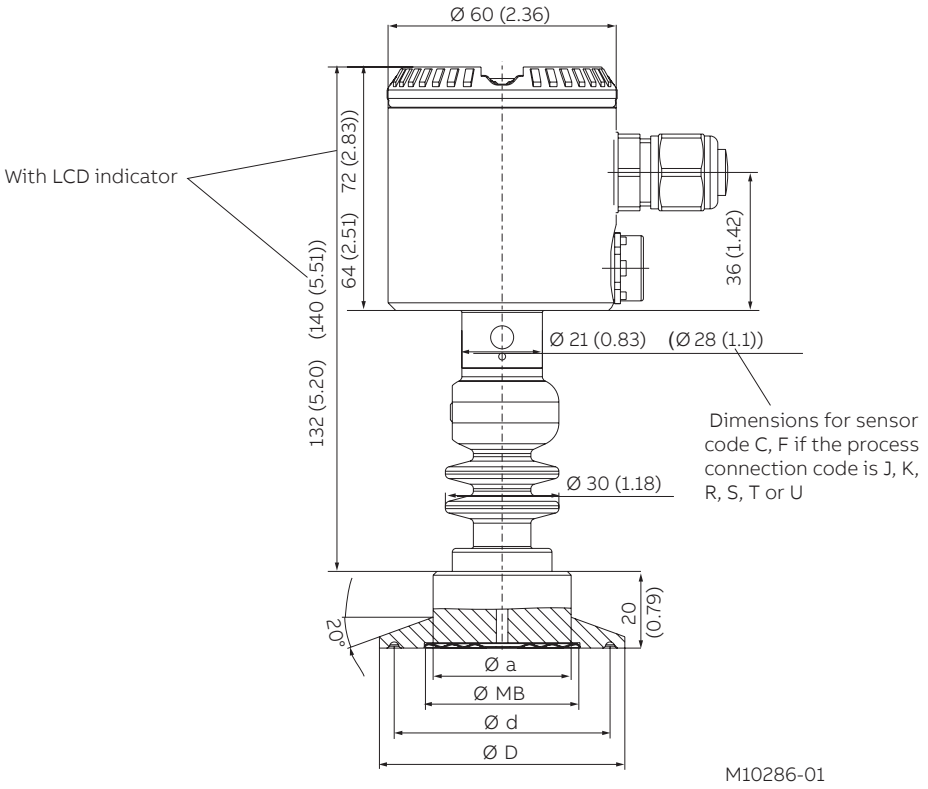


DN	PN	Ø MB	Ø D	Ø d	Ø a
1 1/2“	40	32 (1.26)	50 (1.97)	43,5 (1.71)	36 (1.42)
2“	40	40 (1.57)	64 (2.52)	56,5 (2.22)	36 (1.42)
3“	25	72 (2.83)	91 (3.58)	83,5 (3.29)	77 (3.03)

...Mounting dimensions


Dimensions in mm (inch)

Varivent connection

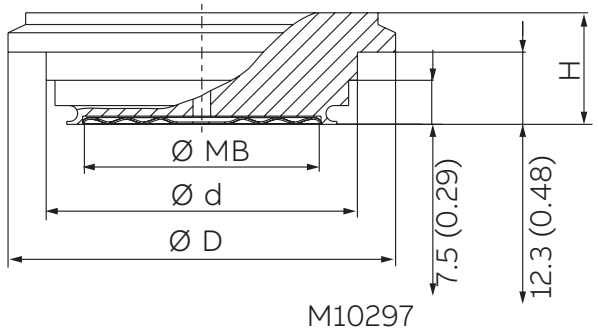

Form	PN	Ø MB	Ø D	Ø d	H
N for pipes DN 40 to 125 and 1 1/2" to 4"	25	60 (2.36)	84 (3.31)	70,9 (2.79)	17 (0.67)
F for pipes DN 25 and 1"	25	40 (1.57)	66 (2.60)	53 (2.08)	17 (0.67)


NEUMO BioControl (flange connection)

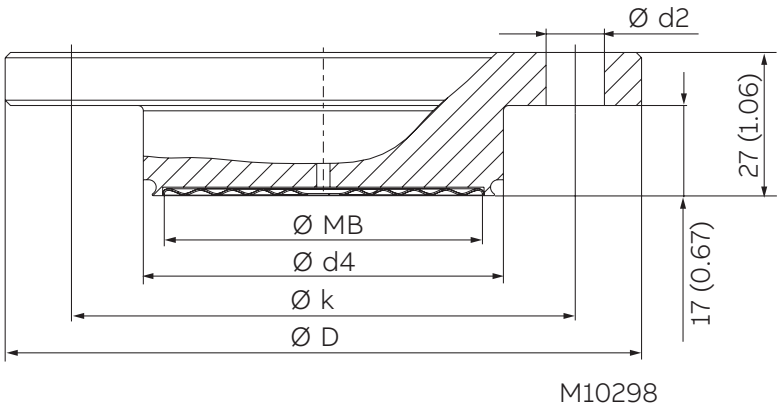

Type	PN	Ø MB	Ø D	Ø d2	Ø k	Ø d4
GR50	16	40 (1.57)	90 (3.54)	4 x Ø 9	70 (2.76)	50 (1.97)
GR65	16	59 (2.32)	120 (4.72)	4 x Ø 11	95 (3.74)	67.9 (2.67)


Pressure sensor with DRD flange



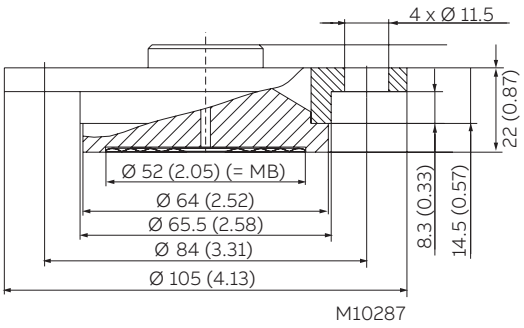

D = 65 mm; PN 40

Dairy coupling

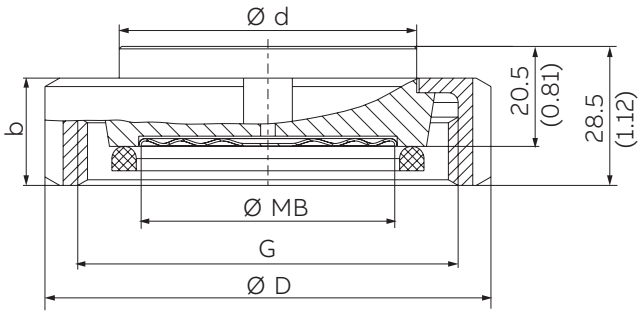


DIN 11851

M10288

DN	PN	Ø MB	Ø D	Ø d	b	G
32	40	32 (1.26)	70 (2.76)	41 (1.61)	21 (0.83)	Rd 58 x 1/6“
40	40	40 (1.57)	78 (3.07)	48 (1.89)	21 (0.83)	Rd 65 x 1/6“
50	25	52 (2.05)	92 (3.62)	61 (2.40)	22 (0.87)	Rd 78 x 1/6“

APV-RJT connection

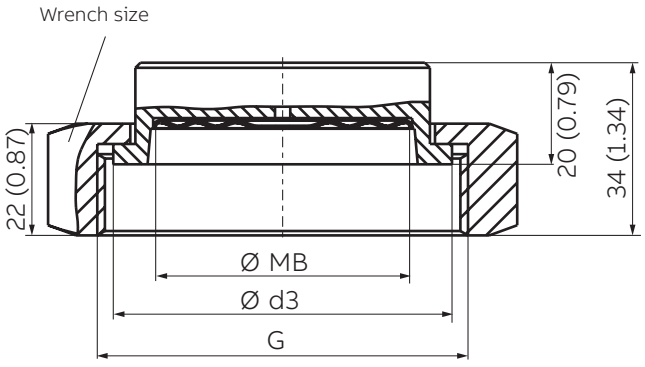


M10289

DN	PN	Ø MB	Ø d3	G	WS
1 1/2“	40	32 (1.26)	54 (2.16)	2 5/16 x 8“	65 (2.65)
2“	40	40 (1.57)	66.7 (2.63)	2 7/8 x 6“	80 (3.15)

...Mounting dimensions

Dimensions in mm (inch)

SMS connection

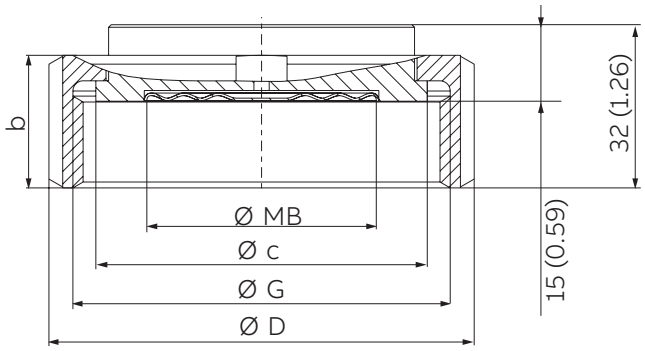

M10290

DN	PN	Ø MB	Ø D	Ø c	G	b
1 1/2“	40	35 (1.38)	74 (2.91)	55 (2.17)	Rd 60 x 1/6“	25 (0.98)
2“	40	45 (1.77)	84 (3.30)	65 (2.56)	Rd 70 x 1/6“	26 (1.02)

Additional effect of process connection, only when temperature of transmitter (ambient temperature) deviates from process connection

Process connection	Temperature effect for each 10 K (18 °F)		Recommended min. measuring span		Weight (kg)
	Process				
	mbar	in H_2O	mbar	in H_2O	
Dairy coupling DIN 11851, DN 32, PN 40	0.22	0.09	45	18.07	0.5
Dairy coupling DIN 11851, DN 40, PN 40	0.20	0.08	40	16.06	0.75
Dairy coupling DIN 11851, DN 50, PN 25	0.12	0.05	40	16.06	0.8
SMS connection DN 1 1/2", PN 40	0.35	0.14	70	28.10	0.8
SMS connection DN 2", PN 40	0.12	0.05	40	16.06	1.0
Tri-clamp connection ASME, DN 1 1/2", PN 40	0.35	0.14	70	28.10	0.6
Tri-clamp connection in acc. with ASME, DN 2", PN 40	0.12	0.05	40	16.06	0.75
Tri-clamp connection in acc. with ASME, DN 3", PN 25	0.08	0.03	40	16.06	1.3
DRD flange, D = 65 mm	0.12	0.05	40	16.06	2.0


Additional effect of process connection based on calibration temperature

Process connection	Temperature effect for each 10 K (18 °F)				Recommended measuring span		Weight (kg)
	Environment		Process				
	mbar	in H_2O	mbar	in H_2O	mbar	in H_2O	
RJT connection DN 1 1/2", PN 40	0.77	0.31	1.20	0.48	400	160.59	0.9
RJT connection DN 2", PN 40	0.24	0.09	0.78	0.31	200	80.29	1.1
Varivent for DN 25 pipes	0.28	0.11	0.79	0.32	215	86.31	0.33
Varivent for DN 40-DN 125 pipes	0.19	0.07	0.90	0.36	220	88.32	0.58
NEUMO BioControl G50	0.16	0.07	0.52	0.21	135	54.20	0.65
NEUMO BioControl G65	0.18	0.07	0,88	0.35	220	88.32	1.3

Model 261GJ / AJ

Dimensions in mm (inch)

Pressure transmitter with inline remote seal and tri-clamp connection per ASME

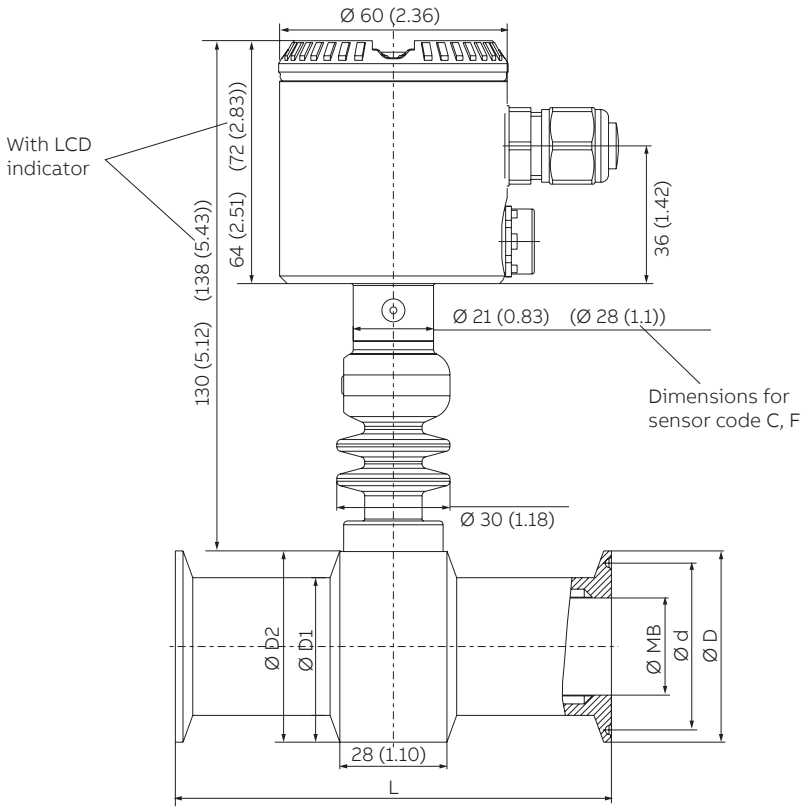

M10291-01


DN	PN	Ø MB	Ø D1	Ø D2	Ø L	Ø d
1 1/2“	40	22.2 (0.87)	36 (1.42)	50 (1.97)	36 (1.42)	43.5 (1.71)
2“	40	34.8 (1.37)	43 (1.69)	55 (2.17)	36 (1.42)	43.5 (1.71)
3“	40	47.5 (1.87)	56 (2.20)	64 (2.52)	77 (3.03)	56.5 (2.22)

...Mounting dimensions

Dimensions in mm (inch)

Inline remote seal with dairy coupling


DIN 11851

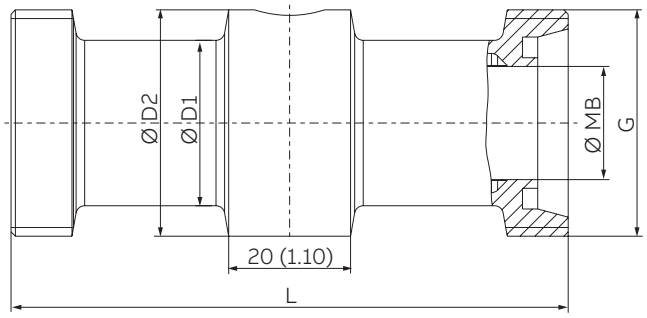

M10292

DN	PN	Ø MB	Ø D1	Ø D2	L	G
25	40	26 (1.02)	38 (1.50)	52 (2.05)	114 (4.49)	Rd 52 x 1/6"
40	40	38 (1.50)	55 (2.17)	65 (2.56)	146 (5.75)	Rd 65 x 1/6"
50	25	50 (1.97)	68 (2.68)	78 (3.07)	156 (6.14)	Rd 78 x 1/6"

Inline remote seal with sandwich design

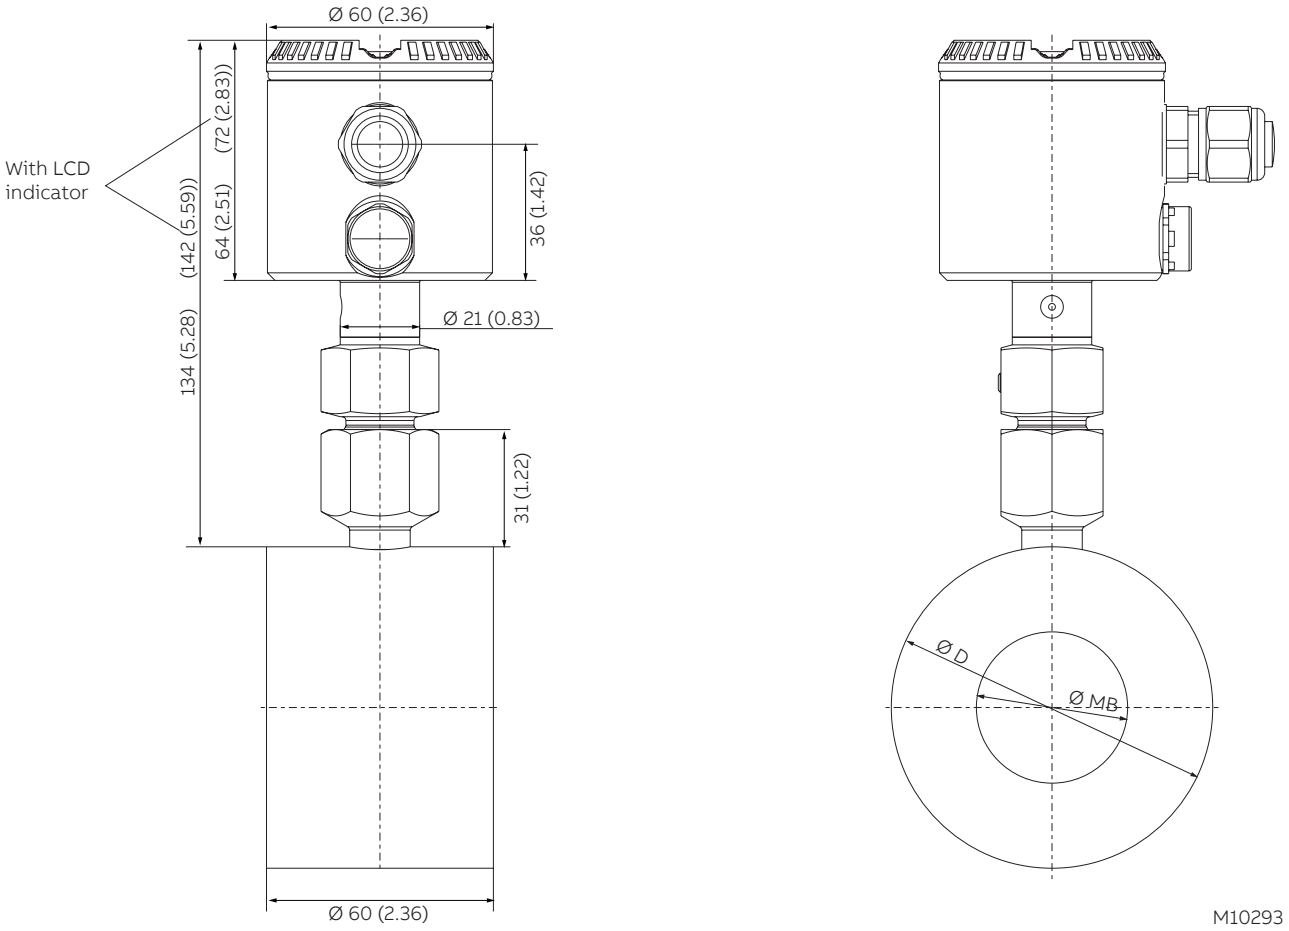

DN	PN (bar)	PN (psi)	Ø MB	Ø D
25 / 1"	6 to 400	150 to 2500	28.5 (1.12)	63 (2.48)
40	6 to 400		43 (1.69)	85 (3.35)
1 1/2"	-		43 (1.69)	78 (3.07)
50 / 2"	6 to 320		54.5 (2.15)	95 (3.74)
80 / 3"	6 to 250		82.5 (3.25)	130 (5.12)

...Mounting dimensions


Accuracy information

Process connection	Temperature effect for each 10 K (18 °F)				Recommended min measuring span		Weight (kg)
	Environment		Process				
	mbar	in H_2O	mbar	in H_2O	mbar	in H_2O	
Dairy coupling DIN 11851, DN 25, PN 40	0.63	0.25	8.19	3.29	2200	883	1.0
Dairy coupling DIN 11851, DN 40, PN 40	0.07	0.03	1.92	0.77	500	201	1.9
Dairy coupling DIN 11851, DN 50, PN 25	0.04	0.01	1.86	0.75	500	201	2.8
Tri-clamp connection for pipes in acc. with ASME, DN 1", PN 40	1.92	0.77	18.54	7.44	5000	2008	1.0
Tri-clamp connection for pipes in acc. with ASME, DN 1 1/2", PN 40	0.08	0.03	0.99	0.40	250	100	1.9
Tri-clamp connection for pipes in acc. with ASME, DN 2", PN 40	0.06	0.02	2.25	0.90	600	241	2.8
DN 25 / ASME 1"	1.76	0.71	9.21	3.70	2800	1124	1.4
DN 40 / ASME 1 1/2"	0.57	0.23	5.03	2.02	1400	562	2.2
DN 50 / ASME 2"	1.57	0.63	16.62	6.67	4500	1807	2.5
DN 80 / ASME 3"	0.74	0.30	7,11	2.85	2000	803	4.0

Model 261GM / AM

Dimensions in mm (inch)

Transmitter with wafer remote seal and internal diaphragm

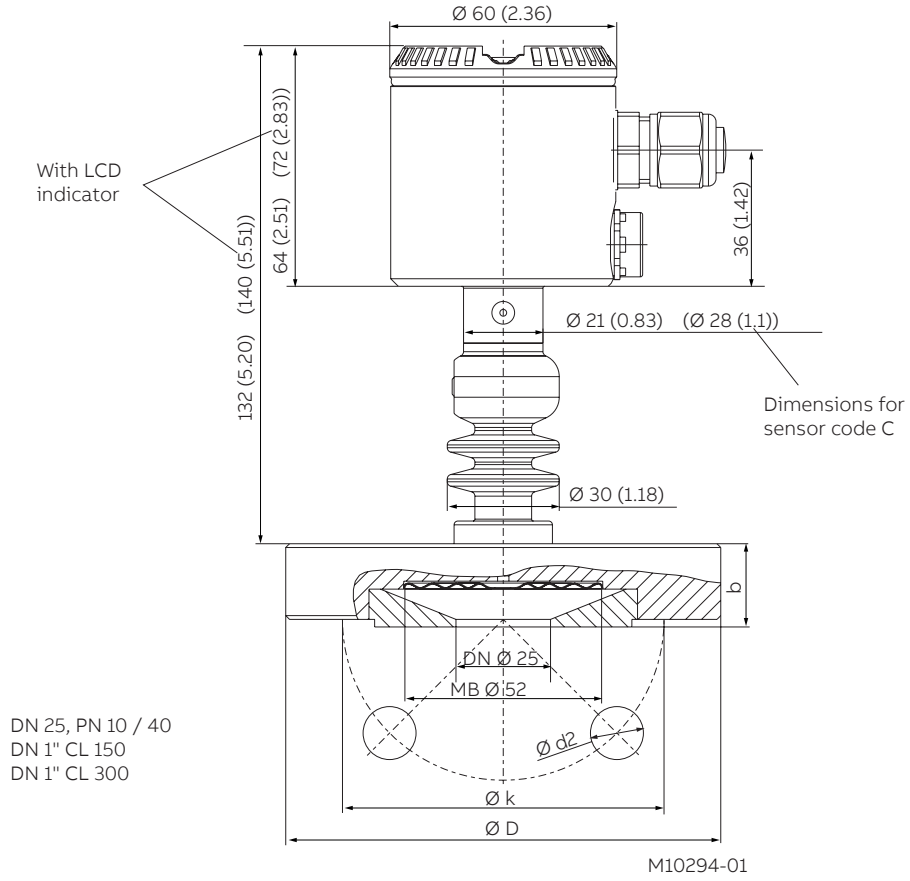


DN	PN	Ø D	Ø k	Ø d2
25	10 / 40	115 (4.53)	85 (3.35)	14 (0.55)
1"	ASME CL 150	110 (4.33)	79.5 (3.13)	16 (0.63)
1"	ASME CL 300	125 (4.92)	89 (3.50)	20 (0.79)

...Mounting dimensions

Dimensions in mm (inch)

Transmitter with wafer remote seal and internal diaphragm

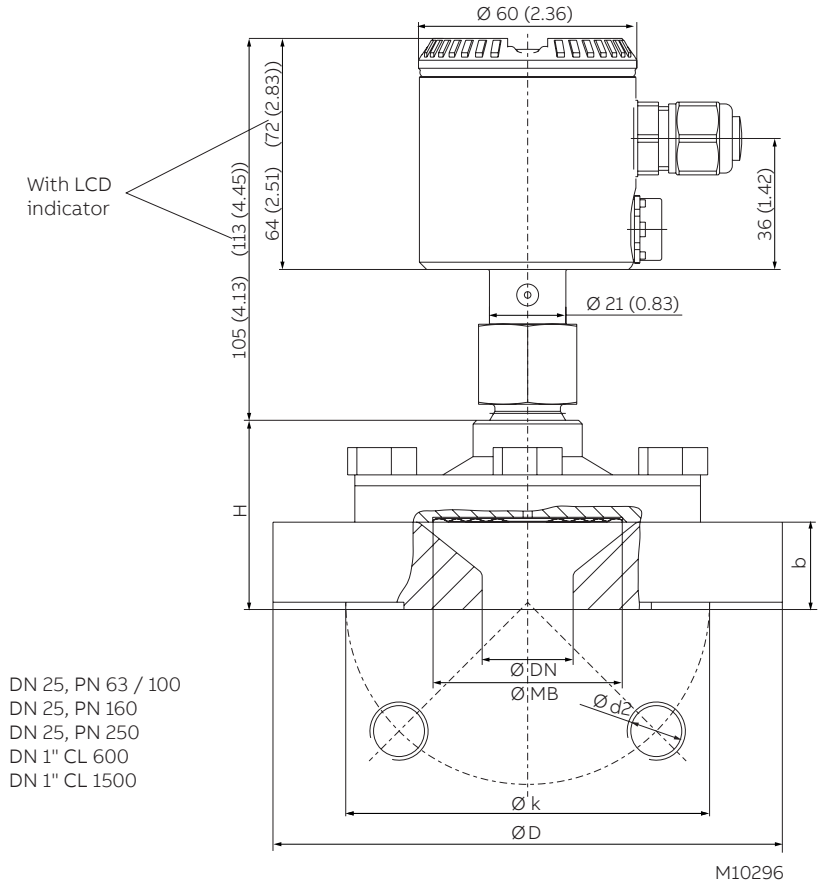

DN	PN	Ø MB	Ø D	Ø k	b	H	Ø d2
25	63 / 100	52 (2.04)	140 (5.51)	100 (3.94)	24 (0.94)	52 (2.05)	4 x M16
	160		140 (5.51)	100 (3.94)	24 (0.94)	52 (2.05)	4 x M16
	250		150 (5.91)	105 (4.13)	28 (1.10)	56 (2.20)	4 x M20
1"	ASME CL 600	52 (2.04)	125 (4.92)	89 (3.50)	24.5 (1.42)	52.5 (0.96)	4 x 5/8"
	ASME CL 1500		150 (5.91)	101.5 (4.00)	36 (1.42)	64 (1.42)	4 x 7/8"


Accuracy information

Process connection	Nominal pressure	Temperature effect for each 10 K (18 °F)				Recommended min measuring span		Weight (kg)
		Environment		Process				
		mbar	in H_2O	mbar	in H_2O	mbar	in H_2O	
1“	ASME CL 150	0.24	0.096	0.78	0.313	160	64.24	1.4
1“	ASME CL 300							1.7
1“	ASME CL 600							3.6
1“	ASME CL 1500							4.0
DN 25	DIN - 10 / 40 bar	0.24	0.096	0.78	0.313	160	64.24	1.5
DN 25	DIN - 63 / 100 bar							3.2
DN 25	DIN - 160 bar							3.6
DN 25	DIN - 250 bar							4.0

...Mounting dimensions

Dimensions in mm (inch)

Model 261GN / AN

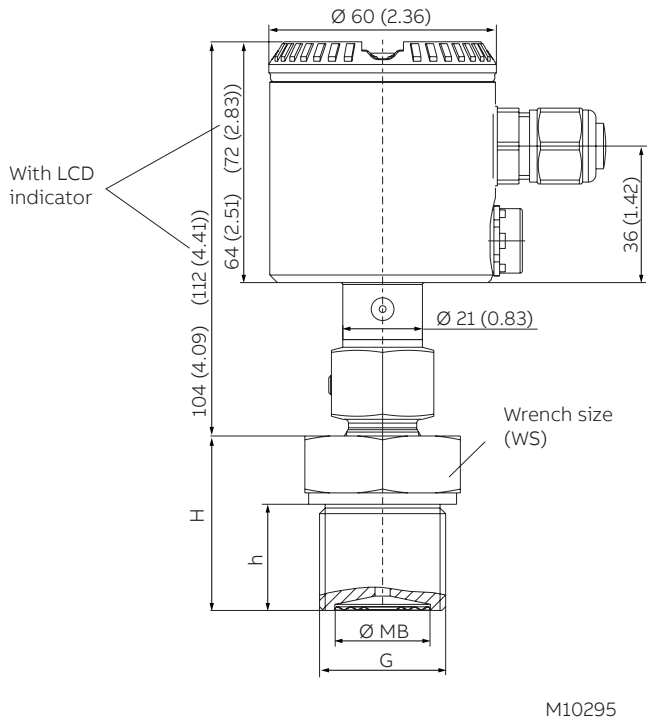

DN	PN	Ø MB	G	WS	h	H	Weight [kg]
1"	600	25 (0.89)	G 1A	41 (1.61)	28 (1.10)	46 (1.81)	0.3
1 1/2"		40 (1.57)	G 1 1/2 A	55 (2.17)	30 (1.18)	50 (1.97)	0.5


Accuracy information

Process connection	Temperature effect for each 10 K (18 °F)				Recommended min measuring span	
	Environment		Process			
	mbar	in H_2O	mbar	in H_2O	mbar	in H_2O
G 1 A - PN 600	14	5.62	35	14.05	6000	2409
G 1 1/2 A - PN 600	2	0.80	4	1.61	1200	482


Electrical connections

HART version

Electrical connections - HART version

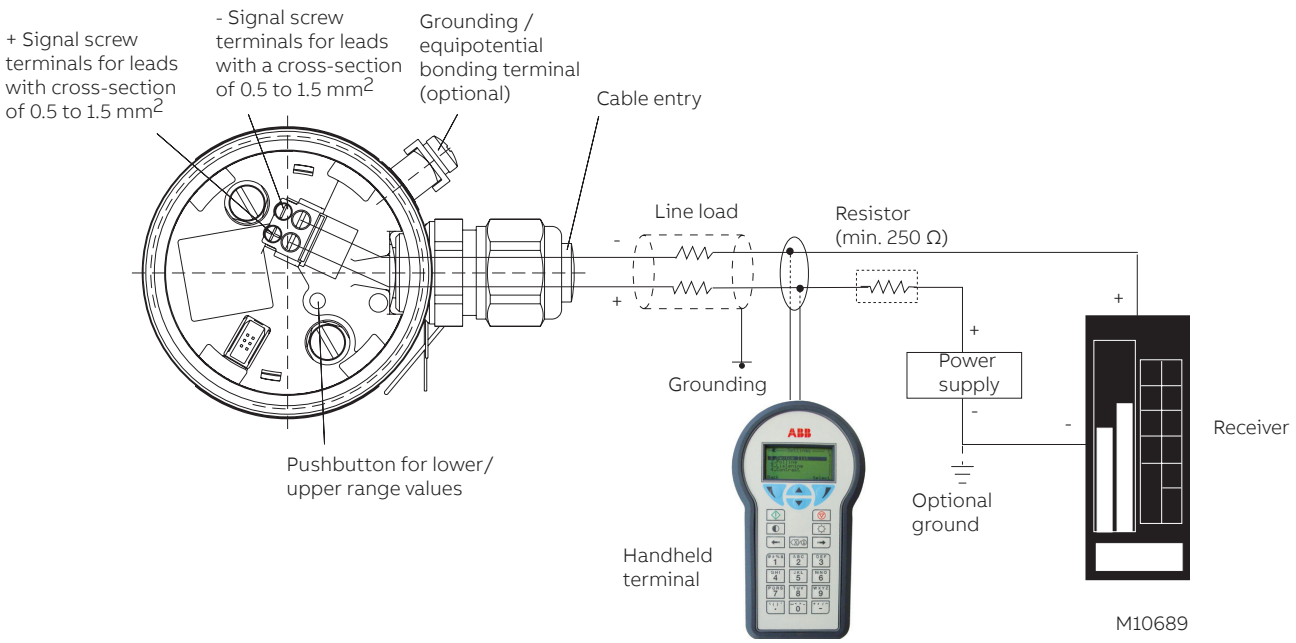

Optional plug connectors

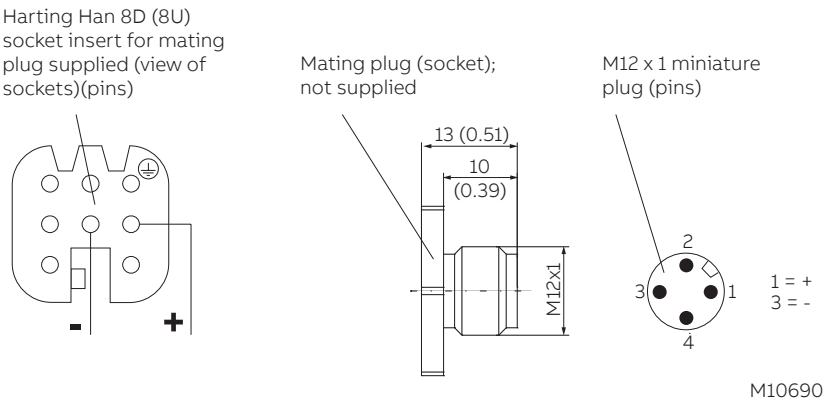

Ordering Information

Basic ordering information 261GC Gauge Pressure Transmitters

Select one character or set of characters from each category and specify complete catalog number.

Refer to additional ordering information and specify one or more codes for each transmitter if additional options are required.

Base model – 1st to 5th characters **Gauge pressure transmitter, process connection flange DN 25 / DN 50 / DN 80 / 1 in. / 2 in. / 3 in., base accuracy 0.1 %**			**261GC**	**X**	**X**	**X**	**X**	**X**	**X**	**X**
Sensor - Span Limits – 6th characters										
6 kPa	60 mbar	24 in. H_2O (45 mm Hg)		C						
40 kPa	400 mbar	160 in. H_2O (300 mm Hg)		F						
250 kPa	2500 mbar	1000 in. H_2O (1875 mm Hg)		L						
1000 kPa	10 bar	145 psi		D						
3000 kPa	30 bar	435 psi		U						
10000 kPa	100 bar	1450 psi		R						
Diaphragm Material / Fill Fluid (sensor) – 7th characters										
Front bonded diaphragm	Silicone oil				R					
Front bonded diaphragm	Inert fluid		(Note: 1)		2					
Front bonded diaphragm	White oil				6					
Size / Mounting Flange Rating – 8th characters										
1 in. / ASME CL 150						3				
1 in. / ASME CL 300						4				
2 in. / ASME CL 150						A				
2 in. / ASME CL 300						D				
2 in. / ASME CL 600						G				
3 in. / ASME CL 150						B				
3 in. / ASME CL 300						E				
3 in. / ASME CL 600						H				
DN 25 / DIN PN 10 / PN 40			(Note: 2)			2				
DN 50 / DIN PN 16 / PN 40						M				
DN 50 / DIN PN 63						P				
DN 50 / DIN PN 100						R				
DN 80 / DIN PN 16 / PN 40						L				
DN 80 / DIN PN 63						Q				
DN 80 / DIN PN 100						S				

continued
see next page

Basic ordering information model 261GC Gauge Pressure Transmitter

				XX	XX	XX	XX	XX	XX
Mounting Flange Material / Seat Form (Flange) – 9th characters									
AISI 316L SST (1.4404)	Form RF (Raised Face) - smooth finish	NACE	(Note: 3)	E					
AISI 316L SST (1.4404)	EN 1092 - B2 (DIN 2526 - Form E)	NACE	(Note: 4)	S					
AISI 316L SST (1.4404)	EN 1092 - B1 (DIN 2526 - Form D)	NACE	(Note: 5)	4					
AISI 316L SST (1.4404)	EN 1092 - E (DIN 2513 - V13)	NACE	(Note: 4)	M					
AISI 316L SST (1.4404)	EN 1092 - D (DIN 2512 - N)	NACE	(Note: 4)	N					
Extension Length / Material – 10th characters									
Flush		NACE			F				
50 mm (2 in.) / AISI 316L SST (1.4404)		NACE			1				
50 mm (2 in.) / Hastelloy C-276		NACE			2				
100 mm (4 in.) / AISI 316L SST (1.4404)		NACE			3				
100 mm (4 in.) / Hastelloy C-276		NACE			4				
150 mm (6 in.) / AISI 316L SST (1.4404)		NACE			5				
150 mm (6 in.) / Hastelloy C-276		NACE			6				
Diaphragm Material (Process Connection) – 11th characters									
AISI 316L SST (1.4435)		NACE	(Note: 6)			S			
Hastelloy C-276		NACE	(Note: 7)			H			
Tantalum		NACE	(Note: 8)			T			
AISI 316L SST (1.4435) with FEP non-adhesive coating		NACE	(Note: 8)			1			
Hastelloy C-276 with FEP non-adhesive coating		NACE	(Note: 8)			2			
Fill Fluid – 12th characters									
Silicone oil							S		
Inert fluid			(Note: 1)				N		
White oil (FDA approved)			(Note: 9)				W		
Silicone oil for vacuum applications							L		
White oil (FDA approved), for vacuum applications			(Note: 9)				Y		
Electronic Housing Material / Electrical Connection – 13th characters									
AISI 316L SST (1.4404) / M16 x 1.5 (with cable gland made of plastic)			(Note: 10)					2	
AISI 316L SST (1.4404) / 1/2-14 NPT (without cable gland)								S	
AISI 316L SST (1.4404) / M20 x 1.5 (with cable gland made of plastic)			(Note: 10)					T	
AISI 316L SST (1.4404) / Harting Han Connector			(Note: 11)					3	
AISI 316L SST (1.4404) / Miniature Connector			(Note: 11)					Z	
Output – 14th characters									
HART digital communication and 4 to 20 mA (Additional options to be ordered by additional ordering code)				(Note: 12)					1

...Ordering information

Additional ordering information for model 261GC

Add one or more 2-digit code(s) after the basic ordering information to select all required options.

		XX	XX	XX	XX	XX	XX
Explosion Protection Certification							
Factory Mutual (FM) - Intrinsically Safe	(Note: 12)	EA					
Canadian Standard Association (CSA) - Intrinsically Safe	(Note: 13)	ED					
ATEX Group II Category 1/2 G - Intrinsic Safety EEx ia		EH					
ATEX Group II Category 1/2 G and 1/2 D - Intrinsic Safety EEx ia (without Cable Gland)	(Note: 13)	EL					
IECEx Ex ia IIC T6 + Ex nA IIC T6, Gas		ER					
IECEx Ex ia IIC T6 + Ex nA IIC T6 + Ex tb. Gas & Dust		ES					
Integrated Digital Display (LCD)							
With integrated LCD display			L1				
Electronic Housing: Ground Terminal							
Housing with external grounding terminal				AA			
Electronic Housing: Cable Gland							
Cable Gland M16 x 1.5 / M20 x 1.5 and atmosphere ventilation of metal					AB		
Applications: Oxygen							
Oil- and grease-free, for oxygen applications (O2) (Pmax = 10 MPa / 100 bar / 1450 psi, Tmax = 60 °C / 140 °F)	(Note: 14)					P1	
Operating Instruction Language							
German							M1
Italian							M2
Spanish							M3
French							M4
English							M5
Swedish							M6
Finnish							M7
Russian							MB
Dutch							MD

Additional ordering information for model 261GC

	XX	XX	XX	XX	XX	XX	XX	XX	XX
Additional Tag Plate									
Stainless steel	I1								
Certificates: 3.1 Calibration									
Inspection certificate 3.1 acc. EN 10204 of calibration		C1							
Certificates: 3.1 Cleanliness Stage									
Inspection certificate 3.1 acc. EN 10204 of cleanliness stage			C3						
Certificates: 3.1 Helium Leakage Test									
Inspection certificate 3.1 acc. EN 10204 of helium leakage test of the sensor module				S2					
Certificates: 3.1 Pressure Test									
Inspection certificate 3.1 acc. EN 10204 of pressure test					C5				
Certificates: 2.1 Instrument Design									
Declaration of compliance with the order 2.1 acc. EN 10204 for instrument design						C6			
Certificates: SIL2									
SIL2 - Declaration of Conformity							CL		
Calibration Record									
Calibration record (Note: 15)								CR	
Certificates: MVO Approval									
MVO approval (Note: 15)									CB

...Ordering information

Additional ordering information for model 261GC

		XX	XX	XX	XX
Material: 2.1 Compliance					
Certificate of compliance with the order 2.1 acc. EN 10204 for process wetted parts		H1			
Material: 3.1 Inspection					
Inspection certificate 3.1 acc. EN 10204 of process wetted parts	(Note: 16)		H3		
Material: 2.2 Test Report					
Test report 2.2 acc. EN 10204 of the pressure bearing and process wetted parts				H4	
Connector Type					
Miniature connector M12 x 1 (without mating plug)					U2
Harting Han 8D (8U) - Straight entry	(Note: 17)				U3

Note 1: Suitable for oxygen applications
Note 2: Only with seat form EN 1092 - B1
Note 3: Only for size / mounting flange rating according to ASME
Note 4: Only for size / mounting flange rating according to DIN
Note 5: Only with size DN 25
Note 6: Not with tube of Hastelloy C
Note 7: Not with tube of stainless steel / Not with size 1 in. / DN 25
Note 8: Not with tube and not with seat form EN 1092 - D (groove) / Not with size 1 in. / DN 25
Note 9: Suitable for food applications
Note 10: With Cable Gland made of Plastic
Note 11: Select connector with additional ordering code
Note 12: Additional options to be ordered by additional ordering code
Note 13: Not available with electrical connection with connector
Note 14: Only available with inert fill
Note 15: Only with Fill Fluid White oil
Note 16: Minor parts with factory certificate acc. EN 10204
Note 17: Only for electrical connection with Harting Han connector

Standard delivery scope (changes possible with additional ordering code)

- For general-purpose applications (no Ex applications)
- No display, no mounting bracket
- English-language operating instructions; English and German-language labels
- Configuration with kPa and °C units
- No test, inspection, or material certificates

Unless otherwise specified prior to manufacture, the customer shall be responsible for the selection of suitable parts that make contact with the medium and appropriate filling fluids in order to ensure compatibility with the relevant process medium.

Basic ordering information 261AC Absolute Pressure Transmitters

Select one character or set of characters from each category and specify complete catalog number.
Refer to additional ordering information and specify one or more codes for each transmitter if additional options are required.

Base model – 1st to 5th characters **Absolute pressure transmitter, process connection flange DN 25 / DN 50 / DN 80 / 1 in. / 2 in. / 3 in., base accuracy 0.1 %**			**261AC**	**X**	**X**	**X**	**X**	**X**	**X**	**X**
Sensor - Span Limits – 6th characters										
40 kPa	400 mbar	160 in. H_2O (300 mm Hg)		F						
250 kPa	2500 mbar	1000 in. H_2O (1875 mm Hg)		L						
1000 kPa	10 bar	145 psi		D						
3000 kPa	30 bar	435 psi		U						
10000 kPa	100 bar	1450 psi		R						
Diaphragm Material / Fill Fluid (sensor) – 7th characters										
Front bonded diaphragm		Silicone oil			R					
Front bonded diaphragm		Inert fluid	(Note: 1)		2					
Front bonded diaphragm		White oil			6					
Size / Mounting Flange Rating – 8th characters										
1 in. / ASME CL 150						3				
1 in. / ASME CL 300						4				
2 in. / ASME CL 150						A				
2 in. / ASME CL 300						D				
2 in. / ASME CL 600						G				
3 in. / ASME CL 150						B				
3 in. / ASME CL 300						E				
3 in. / ASME CL 600						H				
DN 25 // DIN PN 10 / PN 40			(Note: 2)			2				
DN 50 // DIN PN 16 / PN 40						M				
DN 50 / DIN PN 63						P				
DN 50 / DIN PN 100						R				
DN 80 // DIN PN 16 / PN 40						L				
DN 80 / DIN PN 63						Q				
DN 80 / DIN PN 100						S				

continued
see next page

...Ordering information

Basic ordering information model 261AC Absolute Pressure Transmitter

				XX	XX	XX	XX	XX	XX
Mounting Flange Material / Seat Form (Flange) – 9th characters									
AISI 316L SST (1.4404)	Form RF (Raised Face) - smooth finish	NACE	(Note: 3)	E					
AISI 316L SST (1.4404)	EN 1092 - B2 (DIN 2526 - Form E)	NACE	(Note: 4)	S					
AISI 316L SST (1.4404)	EN 1092 - B1 (DIN 2526 - Form D)	NACE	(Note: 5)	4					
AISI 316L SST (1.4404)	EN 1092 - E (DIN 2513 - V13)	NACE	(Note: 4)	M					
AISI 316L SST (1.4404)	EN 1092 - D (DIN 2512 - N)	NACE	(Note: 4)	N					
Extension Length / Material – 10th characters									
Flush		NACE			F				
50 mm (2 in.) / AISI 316L SST (1.4404)		NACE			1				
50 mm (2 in.) / Hastelloy C-276		NACE			2				
100 mm (4 in.) / AISI 316L SST (1.4404)		NACE			3				
100 mm (4 in.) / Hastelloy C-276		NACE			4				
150 mm (6 in.) / AISI 316L SST (1.4404)		NACE			5				
150 mm (6 in.) / Hastelloy C-276		NACE			6				
Diaphragm Material (Process Connection) – 11th characters									
AISI 316L SST (1.4435)		NACE	(Note: 6)			S			
Hastelloy C-276		NACE	(Note: 7)			H			
Tantalum		NACE	(Note: 8)			T			
AISI 316L SST (1.4435) with FEP non-adhesive coating		NACE	(Note: 8)			1			
Hastelloy C-276 with FEP non-adhesive coating		NACE	(Note: 8)			2			
Fill Fluid – 12th characters									
Silicone oil							S		
Inert fluid			(Note: 1)				N		
White oil (FDA approved)			(Note: 9)				W		
Silicone oil for vacuum applications							L		
White oil (FDA approved), for vacuum applications			(Note: 9)				Y		
Electronic Housing Material / Electrical Connection – 13th characters									
AISI 316L SST (1.4404) / M16 x 1.5 (with cable gland made of plastic)			(Note: 10)					2	
AISI 316L SST (1.4404) / 1/2-14 NPT (without cable gland)								S	
AISI 316L SST (1.4404) / M20 x 1.5 (with cable gland made of plastic)			(Note: 10)					T	
AISI 316L SST (1.4404) / Harting Han Connector			(Note: 11)					3	
AISI 316L SST (1.4404) / Miniature Connector			(Note: 11)					Z	
Output – 14th characters									
HART digital communication and 4 to 20 mA (Additional options to be ordered by additional ordering code)			(Note: 12)						1

Additional ordering information for model 261AC

Add one or more 2-digit code(s) after the basic ordering information to select all required options.

		XX	XX	XX	XX	XX	XX
Explosion Protection Certification							
Factory Mutual (FM) - Intrinsically Safe	(Note: 13)	EA					
Canadian Standard Association (CSA) - Intrinsically Safe		ED					
ATEX Group II Category 1/2 G - Intrinsic Safety EEx ia		EH					
ATEX Group II Category 1/2 G and 1/2 D - Intrinsic Safety EEx ia (without Cable Gland)	(Note: 13)	EL					
IECEx Ex ia IIC T6 + Ex nA IIC T6, Gas		ER					
IECEx Ex ia IIC T6 + Ex nA IIC T6 + Ex tb. Gas & Dust		ES					
Integrated Digital Display (LCD)							
With integrated LCD display			L1				
Electronic Housing: Ground Terminal							
Housing with external grounding terminal				AA			
Electronic Housing: Cable Gland							
Cable Gland M16 x 1.5 / M20 x 1.5 and atmosphere ventilation of metal					AB		
Applications: Oxygen							
Oil- and grease-free, for oxygen applications (O2) (Pmax = 10 MPa / 100 bar / 1450 psi, Tmax = 60 °C / 140 °F)	(Note: 14)					P1	
Operating Instruction Language							
German							M1
Italian							M2
Spanish							M3
French							M4
English							M5
Swedish							M6
Finnish							M7
Russian							MB
Dutch							MD

...Ordering information

Additional ordering information for model 261AC

	XX	XX	XX	XX	XX	XX	XX	XX	XX
Additional Tag Plate									
Stainless steel	I1								
Certificates: 3.1 Calibration									
Inspection certificate 3.1 acc. EN 10204 of calibration		C1							
Certificates: 3.1 Cleanliness Stage									
Inspection certificate 3.1 acc. EN 10204 of cleanliness stage			C3						
Certificates: 3.1 Helium Leakage Test									
Inspection certificate 3.1 acc. EN 10204 of helium leakage test of the sensor module				C4					
Certificates: 3.1 Pressure Test									
Inspection certificate 3.1 acc. EN 10204 of pressure test					C5				
Certificates: 2.1 Instrument Design									
Declaration of compliance with the order 2.1 acc. EN 10204 for instrument design						C6			
Certificates: SIL2									
SIL2 - Declaration of Conformity							CL		
Calibration Record									
Calibration record								CB	
Certificates: MVO Approval									
MVO approval (Note: 15)									CR

Additional ordering information for model 261AC

		XX	XX	XX	XX
Material: 2.1 Compliance					
Certificate of compliance with the order 2.1 acc. EN 10204 for process wetted parts		H1			
Material: 3.1 Inspection					
Inspection certificate 3.1 acc. EN 10204 of process wetted parts	(Note: 16)		H3		
Material: 2.2 Test Report					
Test report 2.2 acc. EN 10204 of the pressure bearing and process wetted parts				H4	
Connector Type					
Miniature connector M12 x 1 (without mating plug)					U2
Harting Han 8D (8U) - Straight entry	(Note: 17)				U3

Note 2: Only with seat form EN 1092 - B1
Note 3:Only for size / mounting flange rating according to ASME
Note 4: Only for size / mounting flange rating according to DIN
Note 5: Only with size DN 25
Note 6: Not with tube of Hastelloy C
Note 7: Not with tube of stainless steel / Not with size 1 in. / DN 25
Note 8: Not with tube and not with seat form EN 1092 - D (groove) / Not with size 1 in. / DN 25
Note 9: Suitable for food applications
Note 10: With Cable Gland made of Plastic
Note 11: Select connector with additional ordering code
Note 12: Additional options to be ordered by additional ordering code
Note 13: Not available with electrical connection with connector
Note 14: Only available with inert fill
Note 15: Only with Fill Fluid White oil
Note 16: Minor parts with factory certificate acc. EN 10204
Note 17: Only for electrical connection with Harting Han connector

Standard delivery scope (changes possible with additional ordering code)

- For general-purpose applications (no Ex applications)
- No display, no mounting bracket
- English-language operating instructions; English and German-language labels
- Configuration with kPa and °C units
- No test, inspection, or material certificates

Unless otherwise specified prior to manufacture, the customer shall be responsible for the selection of suitable parts that make contact with the medium and appropriate filling fluids in order to ensure compatibility with the relevant process medium.

...Ordering Information

Basic ordering information 261GG Gauge Pressure Transmitters

Select one character or set of characters from each category and specify complete catalog number.

Refer to additional ordering information and specify one or more codes for each transmitter if additional options are required.

Base model – 1st to 5th characters **Gauge pressure transmitter, hygienic connections, base accuracy 0.1 %**				**261GG**	**X**	**X**	**X**	**X**	**X**	**X**	**X**
Sensor - Span Limits – 6th characters											
40 kPa	400 mbar	160 in. H_2O (300 mm Hg)			F				continued see next page		
250 kPa	2500 mbar	1000 in. H_2O (1875 mm Hg)			L						
1000 kPa	10 bar	145 psi			D						
4000 kPa	40 bar	580 psi			1						
Diaphragm Material / Fill Fluid (sensor) – 7th characters											
Not selected						0					
Process Connection – 8th characters											
Dairy Thread DIN 11851, DN 32, PN 40			(Note: 1)				B				
Dairy Thread DIN 11851, DN 40, PN 40			(Note: 1)				C				
Dairy Thread DIN 11851, DN 50, PN 25			(Note: 1)				D				
SMS 1-1/2 in. union nut PN 40							F				
SMS 2 in. union nut PN 40							G				
RJT union nut DN 1-1/2 in. PN 40							J				
RJT union nut DN 2 in. PN 40							K				
Tri-Clamp Connection acc. ASME 1-1/2 in. PN 40			(Note: 1)				M				
Tri-Clamp Connection acc. ASME 2 in. PN 40			(Note: 1)				N				
Tri-Clamp Connection acc. ASME 3 in. PN 25			(Note: 1)				P				
Varivent for pipes DN 25, PN 25			(Note: 1)				R				
Varivent for pipes DN 40 to DN 125, PN 25			(Note: 1)				S				
Neumo-Biocontrol G50			(Note: 1)				T				
Neumo-Biocontrol G65			(Note: 1)				U				
DRD flange, D = 65 mm			(Note: 1)				Y				

Basic ordering information model 261GG Gauge Pressure Transmitter

			XX	XX	XX	XX	XX
Diaphragm Material (Process Connection) – 9th characters							
AISI 316L SST (1.4435)	NACE		S				
Fill Fluid – 10th characters							
Silicone oil				S			
Inert fluid		(Note: 2)		N			
White oil (FDA approved)		(Note: 3)		W			
Silicone oil for vacuum applications				L			
White oil (FDA approved), for vacuum applications		(Note: 3)		Y			
Gasket– 11th characters							
None		(Note: 4)			1		
Perbunan (max. 120 °C / 248 °F)		(Note: 5)			4		
Viton		(Note: 6)			3		
PTFE		(Note: 5)			2		
Electronic Housing Material / Electrical Connection – 12th characters							
AISI 316L SST (1.4404) / M16 x 1.5 (with cable gland made of plastic)		(Note: 7)				2	
AISI 316L SST (1.4404) / 1/2-14 NPT (without cable gland)						S	
AISI 316L SST (1.4404) / M20 x 1.5 (with cable gland made of plastic)		(Note: 7)				T	
AISI 316L SST (1.4404) / Harting Han Connector		(Note: 8)				3	
AISI 316L SST (1.4404) / Miniature Connector		(Note: 8)				Z	
Output – 13th characters							
HART digital communication and 4 to 20 mA (Additional options to be ordered by additional ordering code)		(Note: 9)					1

...Ordering information

Additional ordering information for model 261GG

Add one or more 2-digit code(s) after the basic ordering information to select all required options.

		XX	XX	XX	XX	XX	XX	XX
Explosion Protection Certification								
Factory Mutual (FM) - Intrinsically Safe	(Note: 10)	EA						
Canadian Standard Association (CSA) - Intrinsically Safe	(Note: 10)	ED						
ATEX Group II Category 1/2 G - Intrinsic Safety EEx ia		EH						
ATEX Group II Category 1/2 G and 1/2 D - Intrinsic Safety EEx ia (without Cable Gland)	(Note: 10)	EL						
IECEx Ex ia IIC T6 + Ex nA IIC T6, Gas		ER						
IECEx Ex ia IIC T6 + Ex nA IIC T6 + Ex tb. Gas & Dust		ES						
Integrated Digital Display (LCD)								
With integrated LCD display			L1					
Electronic Housing: Ground Terminal								
Housing with external grounding terminal				AA				
Electronic Housing: Cable Gland								
Cable Gland M16 x 1.5 / M20 x 1.5 and atmosphere ventilation of metal					AB			
Applications: Oxygen								
Oil- and grease-free, for oxygen applications (O2) (Pmax = 10 MPa / 100 bar / 1450 psi, Tmax = 60 °C / 140 °F)	(Note: 11)					P1		
Applications: Electropolished								
Process connection electropolished, Ra ≤ 0.5 µm							P5	
Operating Instruction Language								
German								M1
Italian								M2
Spanish								M3
French								M4
English								M5
Swedish								M6
Finnish								M7
Russian								MB
Dutch								MD

Additional ordering information for model 261GG

	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Additional Tag Plate										
Stainless steel	I1									
Certificates: 3.1 Calibration										
Inspection certificate 3.1 acc. EN 10204 of calibration		C1								
Certificates: 3.1 Cleanliness Stage										
Inspection certificate 3.1 acc. EN 10204 of cleanliness stage			C3							
Certificates: 3.1 Helium Leakage Test										
Inspection certificate 3.1 acc. EN 10204 of helium leakage test of the sensor module				C4						
Certificates: 3.1 Pressure Test										
Inspection certificate 3.1 acc. EN 10204 of pressure test					C5					
Certificates: 2.1 Instrument Design										
Declaration of compliance with the order 2.1 acc. EN 10204 for instrument design						C6				
Certificates: SIL2										
SIL2 - Declaration of Conformity							CL			
Calibration Record										
Calibration record								CB		
Certificates: 3-A Approval										
3-A Approval									CN	
Certificates: MVO Approval										
MVO approval (Note: 12)										CR

...Ordering information

Additional ordering information for model 261GG

		XX	XX	XX	XX
Material: 2.1 Compliance					
Certificate of compliance with the order 2.1 acc. EN 10204 for process wetted parts		H1			
Material: 3.1 Inspection					
Inspection certificate 3.1 acc. EN 10204 of process wetted parts	(Note: 13)		H3		
Material: 2.2 Test Report					
Test report 2.2 acc. EN 10204 of the pressure bearing and process wetted parts				H4	
Connector Type					
Miniature connector M12 x 1 (without mating plug)					U2
Harting Han 8D (8U) - Straight entry	(Note: 14)				U3

Note 1: Available with 3-A approval
Note 2: Suitable for oxygen applications
Note 3: Suitable for food applications
Note 4: For all connections except dairy thread
Note 5: Only for dairy thread, exception: no sealing will be supplied for 3-A approval
Note 6: Only for DRD flange
Note 7: With Cable Gland made of Plastic
Note 8: Select connector with additional ordering code
Note 9: Additional options to be ordered by additional ordering code
Note 10: Not available with electrical connection with connector
Note 11: Only available with inert fill
Note 12: Only with Fill Fluid White oil
Note 13: Minor parts with factory certificate acc. EN 10204
Note 14: Only for electrical connection with Harting Han connector

Standard delivery scope (changes possible with additional ordering code)

- For general-purpose applications (no Ex applications)
- No display, no mounting bracket
- English-language operating instructions; English and German-language labels
- Configuration with kPa and °C units
- No test, inspection, or material certificates

Unless otherwise specified prior to manufacture, the customer shall be responsible for the selection of suitable parts that make contact with the medium and appropriate filling fluids in order to ensure compatibility with the relevant process medium.

Basic ordering information 261AG Absolute Pressure Transmitters

Select one character or set of characters from each category and specify complete catalog number.
Refer to additional ordering information and specify one or more codes for each transmitter if additional options are required.

Base model – 1st to 5th characters **Absolute pressure transmitter, hygienic connections, base accuracy 0.1 %**			**261AG**	**X**	**X**	**X**	**X**	**X**	**X**	**X**
Sensor - Span Limits – 6th characters										
40 kPa	400 mbar	160 in. H_2O (300 mm Hg)		F				continued see next page		
250 kPa	2500 mbar	1000 in. H_2O (1875 mm Hg)		L						
1000 kPa	10 bar	145 psi		D						
4000 kPa	40 bar	580 psi		1						
Diaphragm Material / Fill Fluid (sensor) – 7th characters										
Not selected					0					
Process Connection – 8th characters										
Dairy Thread DIN 11851, DN 32, PN 40			(Note: 1)			B				
Dairy Thread DIN 11851, DN 40, PN 40			(Note: 1)			C				
Dairy Thread DIN 11851, DN 50, PN 25			(Note: 1)			D				
SMS 1-1/2 in. union nut PN 40						F				
SMS 2 in. union nut PN 40						G				
RJT union nut DN 1-1/2 in. PN 40						J				
RJT union nut DN 2 in. PN 40						K				
Tri-Clamp Connection acc. ASME 1-1/2 in. PN 40			(Note: 1)			M				
Tri-Clamp Connection acc. ASME 2 in. PN 40			(Note: 1)			N				
Tri-Clamp Connection acc. ASME 3 in. PN 25			(Note: 1)			P				
Varivent for pipes DN 25, PN 25			(Note: 1)			R				
Varivent for pipes DN 40 ... DN 125, PN 25			(Note: 1)			S				
Neumo-Biocontrol G50			(Note: 1)			T				
Neumo-Biocontrol G65			(Note: 1)			U				
DRD flange, D = 65 mm			(Note: 1)			Y				

...Ordering information

Basic ordering information model 261AG Absolute Pressure Transmitter

			XX	XX	XX	XX	XX
Diaphragm Material (Process Connection) – 9th characters							
AISI 316L SST (1.4435)	NACE		S				
Fill Fluid – 10th characters							
Silicone oil				S			
Inert fluid		(Note: 2)		N			
White oil (FDA approved)		(Note: 3)		W			
Silicone oil for vacuum applications				L			
White oil (FDA approved), for vacuum applications		(Note: 3)		Y			
Gasket– 11th characters							
None		(Note: 4)			1		
Perbunan (max. 120 °C / 248 °F)		(Note: 5)			4		
Viton		(Note: 6)			3		
PTFE		(Note: 5)			2		
Electronic Housing Material / Electrical Connection – 12th characters							
AISI 316L SST (1.4404) / M16 x 1.5 (with cable gland made of plastic)		(Note: 7)				2	
AISI 316L SST (1.4404) / 1/2-14 NPT (without cable gland)						S	
AISI 316L SST (1.4404) / M20 x 1.5 (with cable gland made of plastic)		(Note: 7)				T	
AISI 316L SST (1.4404) / Harting Han Connector		(Note: 8)				3	
AISI 316L SST (1.4404) / Miniature Connector		(Note: 8)				Z	
Output – 13th characters							
HART digital communication and 4 to 20 mA (Additional options to be ordered by additional ordering code)		(Note: 9)					1

Additional ordering information for model 261AG

Add one or more 2-digit code(s) after the basic ordering information to select all required options.

		XX	XX	XX	XX	XX	XX	XX
Explosion Protection Certification								
Factory Mutual (FM) - Intrinsically Safe	(Note: 10)	EA						
Canadian Standard Association (CSA) - Intrinsically Safe	(Note: 10)	ED						
ATEX Group II Category 1/2 G - Intrinsic Safety EEx ia		EH						
ATEX Group II Category 1/2 G and 1/2 D - Intrinsic Safety EEx ia (without Cable Gland)	(Note: 10)	EL						
IECEx Ex ia IIC T6 + Ex nA IIC T6, Gas		ER						
IECEx Ex ia IIC T6 + Ex nA IIC T6 + Ex tb. Gas & Dust		ES						
Integrated Digital Display (LCD)								
With integrated LCD display			L1					
Electronic Housing: Ground Terminal								
Housing with external grounding terminal				AA				
Electronic Housing: Cable Gland								
Cable Gland M16 x 1.5 / M20 x 1.5 and atmosphere ventilation of metal					AB			
Applications: Oxygen								
Oil- and grease-free, for oxygen applications (O2) (Pmax = 10 MPa / 100 bar / 1450 psi, Tmax = 60 °C / 140 °F)	(Note: 11)					P1		
Applications: Electropolished								
Process connection electropolished, Ra ≤ 0.5 µm							P5	
Operating Instruction Language								
German								M1
Italian								M2
Spanish								M3
French								M4
English								M5
Swedish								M6
Finnish								M7
Russian								MB
Dutch								MD

...Ordering information

Additional ordering information for model 261AG

	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Additional Tag Plate										
Stainless steel	I1									
Certificates: 3.1 Calibration										
Inspection certificate 3.1 acc. EN 10204 of calibration		C1								
Certificates: 3.1 Cleanliness Stage										
Inspection certificate 3.1 acc. EN 10204 of cleanliness stage			C3							
Certificates: 3.1 Helium Leakage Test										
Inspection certificate 3.1 acc. EN 10204 of helium leakage test of the sensor module				C4						
Certificates: 3.1 Pressure Test										
Inspection certificate 3.1 acc. EN 10204 of pressure test					C5					
Certificates: 2.1 Instrument Design										
Declaration of compliance with the order 2.1 acc. EN 10204 for instrument design						C6				
Certificates: SIL2										
SIL2 - Declaration of Conformity							CL			
Calibration Record										
Calibration record								CB		
Certificates: 3-A Approval										
3-A Approval									CN	
Certificates: MVO Approval										
MVO approval (Note: 12)										CR

Additional ordering information for model 261AG

		XX	XX	XX	XX
Material: 2.1 Compliance					
Certificate of compliance with the order 2.1 acc. EN 10204 for process wetted parts		H1			
Material: 3.1 Inspection					
Inspection certificate 3.1 acc. EN 10204 of process wetted parts	(Note: 13)		H3		
Material: 2.2 Test Report					
Inspection certificate 3.1 acc. EN 10204 of cleanliness stage				H4	
Connector Type					
Miniature connector M12 x 1 (without mating plug)					U2
Harting Han 8D (8U) - Straight entry	(Note: 14)				U3

Note 1: Available with 3-A approval
Note 2: Suitable for oxygen applications
Note 3: Suitable for food applications
Note 4: For all connections except dairy thread
Note 5: Only for dairy thread, exception: no sealing will be supplied for 3-A approval
Note 6: Only for DRD flange
Note 7: With Cable Gland made of Plastic
Note 8: Select connector with additional ordering code
Note 9: Additional options to be ordered by additional ordering code
Note 10: Not available with electrical connection with connector
Note 11: Only available with inert fill
Note 12: Only with Fill Fluid White oil
Note 13: Minor parts with factory certificate acc. EN 10204
Note 14: Only for electrical connection with Harting Han connector

Standard delivery scope (changes possible with additional ordering code)

- For general-purpose applications (no Ex applications)
- No display, no mounting bracket
- English-language operating instructions; English and German-language labels
- Configuration with kPa and °C units
- No test, inspection, or material certificates

Unless otherwise specified prior to manufacture, the customer shall be responsible for the selection of suitable parts that make contact with the medium and appropriate filling fluids in order to ensure compatibility with the relevant process medium.

...Ordering Information

Basic ordering information 261GJ Gauge Pressure Transmitters

Select one character or set of characters from each category and specify complete catalog number.

Refer to additional ordering information and specify one or more codes for each transmitter if additional options are required.

Base model – 1st to 5th characters **Gauge pressure transmitter, with direct mount in-line seal, base accuracy 0.1 %**			**261GJ**	**X**	**X**	**X**	**X**	**X**	**X**	**X**
Sensor - Span Limits – 6th characters										
40 kPa	400 mbar	160 in. H_2O (300 mm Hg)		F				continued see next page		
250 kPa	2500 mbar	1000 in. H_2O (1875 mm Hg)		L						
1000 kPa	10 bar	145 psi		D						
3000 kPa	30 bar	435 psi		U						
10000 kPa	100 bar	1450 psi		R						
60000 kPa	600 bar	8700 psi		V						
Diaphragm Material / Fill Fluid (sensor) – 7th characters										
Front bonded diaphragm	Silicone oil				R					
Front bonded diaphragm	Inert fluid				2					
Front bonded diaphragm	White oil		(Note: 1)		6					
Process Connection – 8th characters										
Dairy Thread DIN 11851, DN 25, PN 40			(Note: 2)			E				
Dairy Thread DIN 11851, DN 40, PN 40			(Note: 2)			F				
Dairy Thread DIN 11851, DN 50, PN 25			(Note: 2)			G				
DN 1 in. PN 40, Tri-Clamp, for pipes acc. ASME			(Note: 2)			H				
DN 1-1/2 in. PN 40, Tri-Clamp, for pipes acc. ASME			(Note: 2)			J				
DN 2 in. PN 40, Tri-Clamp, for pipes acc. ASME			(Note: 2)			K				
DN 25 / ASME 1 in.						A				
DN 40						B				
DN 50 / ASME 2 in.						C				
DN 80 / ASME 3 in.						D				

Basic ordering information model 261GJ Gauge Pressure Transmitter

			XX	XX	XX	XX
Diaphragm Material (Process Connection) – 9th characters						
AISI 316L SST (1.4435), NACE	NACE		R			
Fill Fluid – 10th characters						
Silicone oil				S		
Inert fluid		(Note: 3)		N		
White oil (FDA approved)		(Note: 4)		W		
Silicone oil for vacuum applications				L		
White oil (FDA approved), for vacuum applications		(Note: 4)		Y		
Electronic Housing Material / Electrical Connection – 11th characters						
AISI 316L SST (1.4404) / M16 x 1.5 (with cable gland made of plastic)		(Note: 5)			2	
AISI 316L SST (1.4404) / 1/2-14 NPT (without cable gland)					S	
AISI 316L SST (1.4404) / M20 x 1.5 (with cable gland made of plastic)		(Note: 5)			T	
AISI 316L SST (1.4404) / Harting Han Connector		(Note: 6)			3	
AISI 316L SST (1.4404) / Miniature Connector		(Note: 6)			Z	
Output – 12th characters						
HART digital communication and 4 to 20 mA (Additional options to be ordered by additional ordering code)		(Note: 7)				1

...Ordering information

Additional ordering information for model 261GJ

Add one or more 2-digit code(s) after the basic ordering information to select all required options.

		XX	XX	XX	XX	XX	XX
Explosion Protection Certification							
Factory Mutual (FM) - Intrinsically Safe	(Note: 8)	EA					
Canadian Standard Association (CSA) - Intrinsically Safe	(Note: 8)	ED					
ATEX Group II Category 1/2 G - Intrinsic Safety EEx ia		EH					
ATEX Group II Category 1/2 G and 1/2 D - Intrinsic Safety EEx ia (without Cable Gland)	(Note: 8)	EL					
IECEx Ex ia IIC T6 + Ex nA IIC T6, Gas		ER					
IECEx Ex ia IIC T6 + Ex nA IIC T6 + Ex tb. Gas & Dust		ES					
Integrated Digital Display (LCD)							
With integrated LCD display			L1				
Electronic Housing: Ground Terminal							
Housing with external grounding terminal				AA			
Electronic Housing: Cable Gland							
Cable Gland M16 x 1.5 / M20 x 1.5 and atmosphere ventilation of metal					AB		
Applications: Oxygen							
Oil- and grease-free, for oxygen applications (O2) (Pmax = 10 MPa / 100 bar / 1450 psi, Tmax = 60 °C / 140 °F)	(Note: 9)					P1	
Operating Instruction Language							
German							M1
Italian							M2
Spanish							M3
French							M4
English							M5
Swedish							M6
Finnish							M7
Russian							MB
Dutch							MD

Additional ordering information for model 261GJ

	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Additional Tag Plate										
Stainless steel	I1									
Certificates: 3.1 Calibration										
Inspection certificate 3.1 acc. EN 10204 of calibration		C1								
Certificates: 3.1 Cleanliness Stage										
Inspection certificate 3.1 acc. EN 10204 of cleanliness stage			C3							
Certificates: 3.1 Helium Leakage Test										
Inspection certificate 3.1 acc. EN 10204 of helium leakage test of the sensor module				C4						
Certificates: 3.1 Pressure Test										
Inspection certificate 3.1 acc. EN 10204 of pressure test					C5					
Certificates: 2.1 Instrument Design										
Declaration of compliance with the order 2.1 acc. EN 10204 for instrument design						C6				
Certificates: SIL2										
SIL2 - Declaration of Conformity							CL			
Calibration Record										
Calibration record								CB		
Certificates: 3-A Approval										
3-A Approval									CN	
Certificates: MVO Approval										
MVO approval (Note: 10)										CR

...Ordering information

Additional ordering information for model 261GJ

		XX	XX	XX	XX
Material: 2.1 Compliance					
Certificate of compliance with the order 2.1 acc. EN 10204 for process wetted parts		H1			
Material: 3.1 Inspection					
Inspection certificate 3.1 acc. EN 10204 of process wetted parts	(Note: 11)		H3		
Material: 2.2 Test Report					
Test report 2.2 acc. EN 10204 of the pressure bearing and process wetted parts				H4	
Connector Type					
Miniature connector M12 x 1 (without mating plug)					U2
Harting Han 8D (8U) - Straight entry	(Note: 12)				U3

Note 1: Necessary for 3-A approval
Note 2: Available with 3-A approval
Note 3: Suitable for oxygen applications
Note 4: Suitable for food applications
Note 5: With Cable Gland made of Plastic
Note 6: Select connector with additional ordering code
Note 7: Additional options to be ordered by additional ordering code
Note 8: Not available with electrical connection with connector
Note 9: Only available with inert fill
Note 10: Only with Fill Fluid White oil
Note 11:Minor parts with factory certificate acc. EN 10204
Note 12: Only for electrical connection with Harting Han connector and HART output

Standard delivery scope (changes possible with additional ordering code)

- For general-purpose applications (no Ex applications)
- No display, no mounting bracket
- English-language operating instructions; English and German-language labels
- Configuration with kPa and °C units
- No test, inspection, or material certificates

Unless otherwise specified prior to manufacture, the customer shall be responsible for the selection of suitable parts that make contact with the medium and appropriate filling fluids in order to ensure compatibility with the relevant process medium.

Basic ordering information 261AJ Absolute Pressure Transmitters

Select one character or set of characters from each category and specify complete catalog number.
Refer to additional ordering information and specify one or more codes for each transmitter if additional options are required.

Base model – 1st to 5th characters **Absolute pressure transmitter, with direct mount In-line seal, base accuracy 0.1 %**			**261AJ**	**X**	**X**	**X**	**X**	**X**	**X**	**X**
Sensor - Span Limits – 6th characters										
40 kPa	400 mbar	160 in. H_2O (300 mm Hg)		F				continued see next page		
250 kPa	2500 mbar	1000 in. H_2O (1875 mm Hg)		L						
1000 kPa	10 bar	145 psi		D						
3000 kPa	30 bar	435 psi		U						
10000 kPa	100 bar	1450 psi		R						
Diaphragm Material / Fill Fluid (sensor) – 7th characters										
Front bonded diaphragm	Silicone oil				R					
Front bonded diaphragm	Inert fluid				2					
Front bonded diaphragm	White oil		(Note: 1)		6					
Process Connection – 8th characters										
Dairy Thread DIN 11851, DN 25, PN 40			(Note: 2)			E				
Dairy Thread DIN 11851, DN 40, PN 40			(Note: 2)			F				
Dairy Thread DIN 11851, DN 50, PN 25			(Note: 2)			G				
DN 1 in. PN 40, Tri-Clamp, for pipes acc. ASME			(Note: 2)			H				
DN 1-1/2 in. PN 40, Tri-Clamp, for pipes acc. ASME			(Note: 2)			J				
DN 2 in. PN 40, Tri-Clamp, for pipes acc. ASME			(Note: 2)			K				
DN 25 / ASME 1 in.						A				
DN 40						B				
DN 50 / ASME 2 in.						C				
DN 80 / ASME 3 in.						D				

...Ordering information

Basic ordering information model 261AJ Absolute Pressure Transmitter

			XX	XX	XX	XX
Diaphragm Material (Process Connection) – 9th characters						
AISI 316L SST (1.4435), NACE	NACE		R			
Fill Fluid – 10th characters						
Silicone oil				S		
Inert fluid		(Note: 3)		N		
White oil (FDA approved)		(Note: 4)		W		
Silicone oil for vacuum applications				L		
White oil (FDA approved), for vacuum applications		(Note: 4)		Y		
Electronic Housing Material / Electrical Connection – 11th characters						
AISI 316L SST (1.4404) / M16 x 1.5 (with cable gland made of plastic)		(Note: 5)			2	
AISI 316L SST (1.4404) / 1/2-14 NPT (without cable gland)					S	
AISI 316L SST (1.4404) / M20 x 1.5 (with cable gland made of plastic)		(Note: 5)			T	
AISI 316L SST (1.4404) / Harting Han Connector		(Note: 6)			3	
AISI 316L SST (1.4404) / Miniature Connector		(Note: 6)			Z	
Output – 12th characters						
HART digital communication and 4 to 20 mA (Additional options to be ordered by additional ordering code)		(Note: 7)				1

Additional ordering information for model 261AJ

Add one or more 2-digit code(s) after the basic ordering information to select all required options.

		XX	XX	XX	XX	XX	XX
Explosion Protection Certification							
Factory Mutual (FM) - Intrinsically Safe	(Note: 8)	EA					
Canadian Standard Association (CSA) - Intrinsically Safe	(Note: 8)	ED					
ATEX Group II Category 1/2 G - Intrinsic Safety EEx ia		EH					
ATEX Group II Category 1/2 G and 1/2 D - Intrinsic Safety EEx ia (without Cable Gland)	(Note: 8)	EL					
IECEx Ex ia IIC T6 + Ex nA IIC T6, Gas		ER					
IECEx Ex ia IIC T6 + Ex nA IIC T6 + Ex tb. Gas & Dust		ES					
Integrated Digital Display (LCD)							
With integrated LCD display			L1				
Electronic Housing: Ground Terminal							
Housing with external grounding terminal				AA			
Electronic Housing: Cable Gland							
Cable Gland M16 x 1.5 / M20 x 1.5 and atmosphere ventilation of metal					AB		
Applications: Oxygen							
Oil- and grease-free, for oxygen applications (O2) (Pmax = 10 MPa / 100 bar / 1450 psi, Tmax = 60 °C / 140 °F)	(Note: 9)					P1	
Operating Instruction Language							
German							M1
Italian							M2
Spanish							M3
French							M4
English							M5
Swedish							M6
Finnish							M7
Russian							MB
Dutch							MD

...Ordering information

Additional ordering information for model 261AJ

	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Additional Tag Plate										
Stainless steel	I1									
Certificates: 3.1 Calibration										
Inspection certificate 3.1 acc. EN 10204 of calibration		C1								
Certificates: 3.1 Cleanliness Stage										
Inspection certificate 3.1 acc. EN 10204 of cleanliness stage			C3							
Certificates: 3.1 Helium Leakage Test										
Inspection certificate 3.1 acc. EN 10204 of helium leakage test of the sensor module				C4						
Certificates: 3.1 Pressure Test										
Inspection certificate 3.1 acc. EN 10204 of pressure test					C5					
Certificates: 2.1 Instrument Design										
Declaration of compliance with the order 2.1 acc. EN 10204 for instrument design						C6				
Certificates: SIL2										
SIL2 - Declaration of Conformity							CL			
Calibration Record										
Calibration record								CB		
Certificates: 3-A Approval										
3-A Approval									CN	
Certificates: MVO Approval										
MVO approval (Note: 10)										CR

Additional ordering information for model 261AJ

		XX	XX	XX	XX
Material: 2.1 Compliance					
Certificate of compliance with the order 2.1 acc. EN 10204 for process wetted parts		H1			
Material: 3.1 Inspection					
Inspection certificate 3.1 acc. EN 10204 of process wetted parts	(Note: 11)		H3		
Material: 2.2 Test Report					
Test report 2.2 acc. EN 10204 of the pressure bearing and process wetted parts				H4	
Connector Type					
Miniature connector M12 x 1 (without mating plug)					U2
Harting Han 8D (8U) - Straight entry	(Note: 12)				U3

Note 1: Necessary for 3-A approval
Note 2: Available with 3-A approval
Note 3: Suitable for oxygen applications
Note 4: Suitable for food applications
Note 5: With Cable Gland made of Plastic
Note 6: Select connector with additional ordering code
Note 7: Additional options to be ordered by additional ordering code
Note 8: Not available with electrical connection with connector
Note 9: Only available with inert fill
Note 10: Only with Fill Fluid White oil
Note 11: Minor parts with factory certificate acc. EN 10204
Note 12: Only for electrical connection with Harting Han connector and HART output

Standard delivery scope (changes possible with additional ordering code)

- For general-purpose applications (no Ex applications)
- No display, no mounting bracket
- English-language operating instructions; English and German-language labels
- Configuration with kPa and °C units
- No test, inspection, or material certificates

Unless otherwise specified prior to manufacture, the customer shall be responsible for the selection of suitable parts that make contact with the medium and appropriate filling fluids in order to ensure compatibility with the relevant process medium.

...Ordering Information

Basic ordering information 261GM Gauge Pressure Transmitters

Select one character or set of characters from each category and specify complete catalog number.

Refer to additional ordering information and specify one or more codes for each transmitter if additional options are required.

Base model – 1st to 5th characters **Gauge pressure transmitter, with off-line flange DN 25 / 1 in., base accuracy 0.1 %**			**261GM**	**X**	**X**	**X**	**X**	**X**	**X**	**X**
Sensor - Span Limits – 6th characters										
40 kPa	400 mbar	160 in. H_2O (300 mm Hg)		F				continued see next page		
250 kPa	2500 mbar	1000 in. H_2O (1875 mm Hg)		L						
1000 kPa	10 bar	145 psi		D						
3000 kPa	30 bar	435 psi		U						
10000 kPa	100 bar	1450 psi		R						
60000 kPa	600 bar	8700 psi		V						
Diaphragm Material / Fill Fluid (sensor) – 7th characters										
Front bonded diaphragm	Silicone oil				R					
Size / Mounting Flange Rating – 8th characters										
1 in. / ASME CL 150						A				
1 in. / ASME CL 300						C				
1 in. / ASME CL 600						E				
1 in. / ASME CL 1500						K				
DN 25 / DIN PN 10 / PN 40						H				
DN 25 / DIN PN 63 / PN 100						L				
DN 25 / DIN PN 160						T				
DN 25 / DIN PN 250						V				

Basic ordering information model 261GM Gauge Pressure Transmitter

				XX	XX	XX	XX	XX
Mounting Flange Material / Seat Form (Flange) – 9th characters								
AISI 316L SST (1.4404)	Form RF (Raised Face) - smooth finish	NACE	(Note: 1)	E				
AISI 316L SST (1.4404)	EN 1092 - B1 (DIN 2526 - Form D)	NACE	(Note: 2)	4				
AISI 316L SST (1.4404)	EN 1092 - D (DIN 2512 - N)	NACE	(Note: 3)	N				
Diaphragm Material (Process Connection) – 10th characters								
AISI 316L SST (1.4435)		NACE			S			
Fill Fluid – 12th characters								
Silicone oil		NACE				S		
Silicone oil for vacuum applications						L		
Electronic Housing Material / Electrical Connection – 12th characters								
AISI 316L SST (1.4404) / M16 x 1.5 (with cable gland made of plastic)			(Note: 4)				2	
AISI 316L SST (1.4404) / 1/2-14 NPT (without cable gland)							S	
AISI 316L SST (1.4404) / M20 x 1.5 (with cable gland made of plastic)			(Note: 4)				T	
AISI 316L SST (1.4404) / Harting Han Connector			(Note: 5)				3	
AISI 316L SST (1.4404) / Miniature Connector			(Note: 5)				Z	
Output – 13th characters								
HART digital communication and 4 to 20 mA (Additional options to be ordered by additional ordering code)			(Note: 6)					1

...Ordering information

Additional ordering information for model 261GM
Add one or more 2-digit code(s) after the basic ordering information to select all required options.

		XX	XX	XX	XX	XX
Explosion Protection Certification						
Factory Mutual (FM) - Intrinsically Safe	(Note: 7)	EA				
Canadian Standard Association (CSA) - Intrinsically Safe	(Note: 7)	ED				
ATEX Group II Category 1/2 G - Intrinsic Safety EEx ia		EH				
ATEX Group II Category 1/2 G and 1/2 D - Intrinsic Safety EEx ia (without Cable Gland)	(Note: 7)	EL				
IECEx Ex ia IIC T6 + Ex nA IIC T6, Gas		ER				
IECEx Ex ia IIC T6 + Ex nA IIC T6 + Ex tb. Gas & Dust		ES				
Integrated Digital Display (LCD)						
With integrated LCD display			L1			
Electronic Housing: Ground Terminal						
Housing with external grounding terminal				AA		
Electronic Housing: Cable Gland						
Cable Gland M16 x 1.5 / M20 x 1.5 and atmosphere ventilation of metal					AB	
Operating Instruction Language						
German						M1
Italian						M2
Spanish						M3
French						M4
English						M5
Swedish						M6
Finnish						M7
Russian						MB
Dutch						MD

Additional ordering information for model 261GM

	XX	XX	XX	XX	XX	XX	XX	XX	XX
Additional Tag Plate									
Stainless steel	I1								
Certificates: 3.1 Calibration									
Inspection certificate 3.1 acc. EN 10204 of calibration		C1							
Certificates: 3.1 Cleanliness Stage									
Inspection certificate 3.1 acc. EN 10204 of cleanliness stage			C3						
Certificates: 3.1 Helium Leakage Test									
Inspection certificate 3.1 acc. EN 10204 of helium leakage test of the sensor module				C4					
Certificates: 3.1 Pressure Test									
Inspection certificate 3.1 acc. EN 10204 of pressure test					C5				
Certificates: 2.1 Instrument Design									
Declaration of compliance with the order 2.1 acc. EN 10204 for instrument design						C6			
Certificates: SIL2									
SIL2 - Declaration of Conformity							CL		
Calibration Record									
Calibration record								CB	
Certificates: MVO Approval									
MVO approval (Note: 8)									CR

...Ordering information

Additional ordering information for model 261GM

		XX	XX	XX	XX
Material: 2.1 Compliance					
Certificate of compliance with the order 2.1 acc. EN 10204 for process wetted parts		H1			
Material: 3.1 Inspection					
Inspection certificate 3.1 acc. EN 10204 of process wetted parts	(Note: 9)		H3		
Material: 2.2 Test Report					
Test report 2.2 acc. EN 10204 of the pressure bearing and process wetted parts				H4	
Connector Type					
Miniature connector M12 x 1 (without mating plug)					U2
Harting Han 8D (8U) - Straight entry	(Note: 10)				U3

Note 1: Only for size / mounting flange rating according to ASME
Note 2: Only with size / mounting flange rating according to DIN
Note 3: Only for size / mounting flange rating according to DIN and only for 10 / 40 bar
Note 4: With Cable Gland made of Plastic
Note 5: Select connector with additional ordering code
Note 6: Additional options to be ordered by additional ordering code
Note 7: Not available with electrical connection with connector
Note 8: Only with Fill Fluid White oil
Note 9: Minor parts with factory certificate acc. EN 10204
Note 10: Only for electrical connection with Harting Han connector

Standard delivery scope (changes possible with additional ordering code)

- For general-purpose applications (no Ex applications)
- No display, no mounting bracket
- English-language operating instructions; English and German-language labels
- Configuration with kPa and °C units
- No test, inspection, or material certificates

Unless otherwise specified prior to manufacture, the customer shall be responsible for the selection of suitable parts that make contact with the medium and appropriate filling fluids in order to ensure compatibility with the relevant process medium.

Basic ordering information 261AM Absolute Pressure Transmitters

Select one character or set of characters from each category and specify complete catalog number.
Refer to additional ordering information and specify one or more codes for each transmitter if additional options are required.

Base model – 1st to 5th characters **Absolute pressure transmitter, with off-line flange DN 25 / 1 in., base accuracy 0.1 %**			**261AM**	**X**	**X**	**X**	**X**	**X**	**X**	**X**
Sensor - Span Limits – 6th characters										
40 kPa	400 mbar	160 in. H_2O (300 mm Hg)		F				continued see next page		
250 kPa	2500 mbar	1000 in. H_2O (1875 mm Hg)		L						
1000 kPa	10 bar	145 psi		D						
3000 kPa	30 bar	435 psi		U						
10000 kPa	100 bar	1450 psi		R						
Diaphragm Material / Fill Fluid (sensor) – 7th characters										
Front bonded diaphragm	Silicone oil				R					
Size / Mounting Flange Rating – 8th characters										
1 in. / ASME CL 150						A				
1 in. / ASME CL 300						C				
1 in. / ASME CL 600						E				
1 in. / ASME CL 1500						K				
DN 25 // DIN PN 10 / PN 40						H				
DN 25 // DIN PN 63 / PN 100						L				
DN 25 / DIN PN 160						T				
DN 25 / DIN PN 250						V				

...Ordering information

Basic ordering information model 261AM Absolute Pressure Transmitter

				XX	XX	XX	XX	XX
Mounting Flange Material / Seat Form (Flange) – 9th characters								
AISI 316L SST (1.4404)	Form RF (Raised Face) - smooth finish	NACE	(Note: 1)	E				
AISI 316L SST (1.4404)	EN 1092 - B1 (DIN 2526 - Form D)	NACE	(Note: 2)	4				
AISI 316L SST (1.4404)	EN 1092 - D (DIN 2512 - N)	NACE	(Note: 3)	N				
Diaphragm Material (Process Connection) – 10th characters								
AISI 316L SST (1.4435)		NACE			S			
Fill Fluid – 11th characters								
Silicone oil		NACE				S		
Silicone oil for vacuum applications						L		
Electronic Housing Material / Electrical Connection – 12th characters								
AISI 316L SST (1.4404) / M16 x 1.5 (with cable gland made of plastic)			(Note: 4)				2	
AISI 316L SST (1.4404) / 1/2-14 NPT (without cable gland)							S	
AISI 316L SST (1.4404) / M20 x 1.5 (with cable gland made of plastic)							T	
AISI 316L SST (1.4404) / Harting Han Connector			(Note: 5)				3	
AISI 316L SST (1.4404) / Miniature Connector			(Note: 5)				Z	
Output – 13th characters								
HART digital communication and 4 to 20 mA (Additional options to be ordered by additional ordering code)			(Note: 6)					1

Additional ordering information for model 261AM

Add one or more 2-digit code(s) after the basic ordering information to select all required options.

		XX	XX	XX	XX	XX
Explosion Protection Certification						
Factory Mutual (FM) - Intrinsically Safe	(Note: 7)	EA				
Canadian Standard Association (CSA) - Intrinsically Safe	(Note: 7)	ED				
ATEX Group II Category 1/2 G - Intrinsic Safety EEx ia		EH				
ATEX Group II Category 1/2 G and 1/2 D - Intrinsic Safety EEx ia (without Cable Gland)	(Note: 7)	EL				
IECEx Ex ia IIC T6 + Ex nA IIC T6, Gas		ER				
IECEx Ex ia IIC T6 + Ex nA IIC T6 + Ex tb. Gas & Dust		ES				
Integrated Digital Display (LCD)						
With integrated LCD display			L1			
Electronic Housing: Ground Terminal						
Housing with external grounding terminal				AA		
Electronic Housing: Cable Gland						
Cable Gland M16 x 1.5 / M20 x 1.5 and atmosphere ventilation of metal					AB	
Operating Instruction Language						
German						M1
Italian						M2
Spanish						M3
French						M4
English						M5
Swedish						M6
Finnish						M7
Russian						MB
Dutch						MD

...Ordering information

Additional ordering information for model 261AM

	XX	XX	XX	XX	XX	XX	XX	XX	XX
Additional Tag Plate									
Stainless steel	I1								
Certificates: 3.1 Calibration									
Inspection certificate 3.1 acc. EN 10204 of calibration		C1							
Certificates: 3.1 Cleanliness Stage									
Inspection certificate 3.1 acc. EN 10204 of cleanliness stage			C3						
Certificates: 3.1 Helium Leakage Test									
Inspection certificate 3.1 acc. EN 10204 of helium leakage test of the sensor module				C4					
Certificates: 3.1 Pressure Test									
Inspection certificate 3.1 acc. EN 10204 of pressure test					C5				
Certificates: 2.1 Instrument Design									
Declaration of compliance with the order 2.1 acc. EN 10204 for instrument design						C6			
Certificates: SIL2									
SIL2 - Declaration of Conformity							CL		
Calibration Record									
Calibration record								CB	
Certificates: MVO Approval									
MVO approval (Note: 8)									CR

Additional ordering information for model 261AM

		XX	XX	XX	XX
Material: 2.1 Compliance					
Certificate of compliance with the order 2.1 acc. EN 10204 for process wetted parts		H1			
Material: 3.1 Inspection					
Inspection certificate 3.1 acc. EN 10204 of process wetted parts	(Note: 9)		H3		
Material: 2.2 Test Report					
Test report 2.2 acc. EN 10204 of the pressure bearing and process wetted parts				H4	
Connector Type					
Miniature connector M12 x 1 (without mating plug)					U2
Harting Han 8D (8U) - Straight entry	(Note: 10)				U3

Note 1: Only for size / mounting flange rating according to ASME
Note 2: Only for size / mounting flange rating according to DIN
Note 3: Only for size / mounting flange rating according to DIN and only for 10 / 40 bar
Note 4: With Cable Gland made of Plastic
Note 5: Select connector with additional ordering code
Note 6: Additional options to be ordered by additional ordering code
Note 7: Not available with electrical connection with connector
Note 8: Only with Fill Fluid White oil
Note 9: Minor parts with factory certificate acc. EN 10204
Note 10: Only for electrical connection with Harting Han connector

Standard delivery scope (changes possible with additional ordering code)

- For general-purpose applications (no Ex applications)
- No display, no mounting bracket
- English-language operating instructions; English and German-language labels
- Configuration with kPa and °C units
- No test, inspection, or material certificates

Unless otherwise specified prior to manufacture, the customer shall be responsible for the selection of suitable parts that make contact with the medium and appropriate filling fluids in order to ensure compatibility with the relevant process medium.

...Ordering Information

Basic ordering information 261GN Gauge Pressure Transmitters

Select one character or set of characters from each category and specify complete catalog number.

Refer to additional ordering information and specify one or more codes for each transmitter if additional options are required.

Base model – 1st to 5th characters **Gauge pressure transmitter, process connection front-bonded diaphragm, base accuracy 0.1 %**			**261GN**	**X**	**X**	**X**	**X**	**X**	**X**	**X**
Sensor - Span Limits – 6th characters								continued see next page		
250 kPa	2500 mbar	1000 in. H_2O (1875 mm Hg)		L						
1000 kPa	10 bar	145 psi		D						
3000 kPa	30 bar	435 psi		U						
10000 kPa	100 bar	1450 psi		R						
60000 kPa	600 bar	8700 psi		V						
Diaphragm Material / Fill Fluid (sensor) – 7th characters										
Front bonded diaphragm	Silicone oil				R					
Front bonded diaphragm	Inert fluid				2					
Front bonded diaphragm	White oil				6					
Process Connection – 8th characters										
G 1 A / PN 600						1				
G 1-1/2 A / PN 600						2				

Basic ordering information model 261GN Gauge Pressure Transmitter

			XX	XX	XX	XX
Diaphragm Material (Process Connection) – 9th characters						
AISI 316L SST (1.4435)	NACE		S			
Fill Fluid – 10th characters						
Silicone oil				S		
Inert fluid		(Note: 1)		N		
White oil (FDA approved)		(Note: 2)		W		
Silicone oil for vacuum applications				L		
White oil (FDA approved), for vacuum applications		(Note: 2)		Y		
Electronic Housing Material / Electrical Connection – 11th characters						
AISI 316L SST (1.4404) / M16 x 1.5 (with cable gland made of plastic)		(Note: 3)			2	
AISI 316L SST (1.4404) / 1/2-14 NPT (without cable gland)					S	
AISI 316L SST (1.4404) / M20 x 1.5 (with cable gland made of plastic)		(Note: 3)			T	
AISI 316L SST (1.4404) / Harting Han Connector		(Note: 4)			3	
AISI 316L SST (1.4404) / Miniature Connector		(Note: 4)			Z	
Output – 12th characters						
HART digital communication and 4 to 20 mA (Additional options to be ordered by additional ordering code)		(Note: 5)				1

...Ordering information

Additional ordering information for model 261GN

Add one or more 2-digit code(s) after the basic ordering information to select all required options.

		XX	XX	XX	XX	XX	XX
Explosion Protection Certification							
Factory Mutual (FM) - Intrinsically Safe	(Note: 6)	EA					
Canadian Standard Association (CSA) - Intrinsically Safe	(Note: 6)	ED					
ATEX Group II Category 1/2 G - Intrinsic Safety EEx ia		EH					
ATEX Group II Category 1/2 G and 1/2 D - Intrinsic Safety EEx ia (without Cable Gland)	(Note: 6)	EL					
IECEx Ex ia IIC T6 + Ex nA IIC T6, Gas		ER					
IECEx Ex ia IIC T6 + Ex nA IIC T6 + Ex tb. Gas & Dust		ES					
Integrated Digital Display (LCD)							
With integrated LCD display			L1				
Electronic Housing: Ground Terminal							
Housing with external grounding terminal				AA			
Electronic Housing: Cable Gland							
Cable Gland M16 x 1.5 / M20 x 1.5 and atmosphere ventilation of metal					AB		
Applications: Oxygen							
Oil- and grease-free, for oxygen applications (O2) (Pmax = 10 MPa / 100 bar / 1450 psi, Tmax = 60 °C / 140 °F)	(Note: 7)					P1	
Operating Instruction Language							
German							M1
Italian							M2
Spanish							M3
French							M4
English							M5
Swedish							M6
Finnish							M7
Russian							MB
Dutch							MD

Additional ordering information for model 261GN

	XX	XX	XX	XX	XX	XX	XX	XX	XX
Additional Tag Plate									
Stainless steel	I1								
Certificates: 3.1 Calibration									
Inspection certificate 3.1 acc. EN 10204 of calibration		C1							
Certificates: 3.1 Cleanliness Stage									
Inspection certificate 3.1 acc. EN 10204 of cleanliness stage			C3						
Certificates: 3.1 Helium Leakage Test									
Inspection certificate 3.1 acc. EN 10204 of helium leakage test of the sensor module				C4					
Certificates: 3.1 Pressure Test									
Inspection certificate 3.1 acc. EN 10204 of pressure test					C5				
Certificates: 2.1 Instrument Design									
Declaration of compliance with the order 2.1 acc. EN 10204 for instrument design						C6			
Certificates: SIL2									
SIL2 - Declaration of Conformity							CL		
Calibration Record									
Calibration record								CB	
Certificates: MVO Approval									
MVO approval (Note: 8)									CR

...Ordering information

Additional ordering information for model 261GN

		XX	XX	XX	XX
Material: 2.1 Compliance					
Certificate of compliance with the order 2.1 acc. EN 10204 for process wetted parts		H1			
Material: 3.1 Inspection					
Inspection certificate 3.1 acc. EN 10204 of process wetted parts	(Note: 9)		H3		
Material: 2.2 Test Report					
Test report 2.2 acc. EN 10204 of the pressure bearing and process wetted parts				H4	
Connector Type					
Miniature connector M12 x 1 (without mating plug)					U2
Harting Han 8D (8U) - Straight entry					U3

Note 1: Suitable for oxygen applications
Note 2: Suitable for food applications
Note 3: With Cable Gland made of Plastic
Note 4: Select connector with additional ordering code
Note 5: Additional options to be ordered by additional ordering code
Note 6: Not available with electrical connection with connector
Note 7: Only available with inert fill
Note 8: Only with Fill Fluid White oil
Note 9: Minor parts with factory certificate acc. EN 10204

Standard delivery scope (changes possible with additional ordering code)

- For general-purpose applications (no Ex applications)
- No display, no mounting bracket
- English-language operating instructions; English and German-language labels
- Configuration with kPa and °C units
- No test, inspection, or material certificates

Unless otherwise specified prior to manufacture, the customer shall be responsible for the selection of suitable parts that make contact with the medium and appropriate filling fluids in order to ensure compatibility with the relevant process medium.

Basic ordering information 261AN Absolute Pressure Transmitters

Select one character or set of characters from each category and specify complete catalog number.

Refer to additional ordering information and specify one or more codes for each transmitter if additional options are required.

Base model – 1st to 5th characters **Absolute pressure transmitter, process connection front bonded diaphragm, base accuracy 0.1 %**			**261AN**	**X**	**X**	**X**	**X**	**X**	**X**	**X**
Sensor - Span Limits – 6th characters								continued see next page		
250 kPa	2500 mbar	1000 in. H_2O (1875 mm Hg)		L						
1000 kPa	10 bar	145 psi		D						
3000 kPa	30 bar	435 psi		U						
10000 kPa	100 bar	1450 psi		R						
Diaphragm Material / Fill Fluid (sensor) – 7th characters										
Front bonded diaphragm	Silicone oil				R					
Front bonded diaphragm	Inert fluid				2					
Front bonded diaphragm	White oil				6					
Process Connection – 8th characters										
G 1 A / PN 600						1				
G 1-1/2 A / PN 600						2				

...Ordering information

Basic ordering information model 261AN Absolute Pressure Transmitter

			XX	XX	XX	XX
Diaphragm Material (Process Connection) – 9th characters						
AISI 316L SST (1.4435)	NACE		S			
Fill Fluid – 10th characters						
Silicone oil				S		
Inert fluid		(Note: 1)		N		
White oil (FDA approved)		(Note: 2)		W		
Silicone oil for vacuum applications				L		
White oil (FDA approved), for vacuum applications		(Note: 2)		Y		
Electronic Housing Material / Electrical Connection – 11th characters						
AISI 316L SST (1.4404) / M16 x 1.5 (with cable gland made of plastic)		(Note: 3)			2	
AISI 316L SST (1.4404) / 1/2-14 NPT (without cable gland)					S	
AISI 316L SST (1.4404) / M20 x 1.5 (with cable gland made of plastic)		(Note: 3)			T	
AISI 316L SST (1.4404) / Harting Han Connector		(Note: 4)			3	
AISI 316L SST (1.4404) / Miniature Connector		(Note: 4)			Z	
Output – 12th characters						
HART digital communication and 4 to 20 mA (Additional options to be ordered by additional ordering code)		(Note: 5)				1

Additional ordering information for model 261AN

Add one or more 2-digit code(s) after the basic ordering information to select all required options.

		XX	XX	XX	XX	XX	XX
Explosion Protection Certification							
Factory Mutual (FM) - Intrinsically Safe	(Note: 6)	EA					
Canadian Standard Association (CSA) - Intrinsically Safe	(Note: 6)	ED					
ATEX Group II Category 1/2 G - Intrinsic Safety EEx ia		EH					
ATEX Group II Category 1/2 G and 1/2 D - Intrinsic Safety EEx ia (without Cable Gland)	(Note: 6)	EL					
IECEx Ex ia IIC T6 + Ex nA IIC T6, Gas		ER					
IECEx Ex ia IIC T6 + Ex nA IIC T6 + Ex tb. Gas & Dust		ES					
Integrated Digital Display (LCD)							
With integrated LCD display			L1				
Electronic Housing: Ground Terminal							
Housing with external grounding terminal				AA			
Electronic Housing: Cable Gland							
Cable Gland M16 x 1.5 / M20 x 1.5 and atmosphere ventilation of metal					AB		
Applications: Oxygen							
Oil- and grease-free, for oxygen applications (O2) (Pmax = 10 MPa / 100 bar / 1450 psi, Tmax = 60 °C / 140 °F)	(Note: 7)					P1	
Operating Instruction Language							
German							M1
Italian							M2
Spanish							M3
French							M4
English							M5
Swedish							M6
Finnish							M7
Russian							MB
Dutch							MD

...Ordering information

Additional ordering information for model 261AN

	XX	XX	XX	XX	XX	XX	XX	XX	XX
Additional Tag Plate									
Stainless steel	I1								
Certificates: 3.1 Calibration									
Inspection certificate 3.1 acc. EN 10204 of calibration		C1							
Certificates: 3.1 Cleanliness Stage									
Inspection certificate 3.1 acc. EN 10204 of cleanliness stage			C3						
Certificates: 3.1 Helium Leakage Test									
Inspection certificate 3.1 acc. EN 10204 of helium leakage test of the sensor module				C4					
Certificates: 3.1 Pressure Test									
Inspection certificate 3.1 acc. EN 10204 of pressure test					C5				
Certificates: 2.1 Instrument Design									
Declaration of compliance with the order 2.1 acc. EN 10204 for instrument design						C6			
Certificates: SIL2									
SIL2 - Declaration of Conformity							CL		
Calibration Record									
Calibration record								CB	
Certificates: MVO Approval									
MVO approval (Note: 8)									CR

Additional ordering information for model 261AN

		XX	XX	XX	XX
Material: 2.1 Compliance					
Certificate of compliance with the order 2.1 acc. EN 10204 for process wetted parts		H1			
Material: 3.1 Inspection					
Inspection certificate 3.1 acc. EN 10204 of process wetted parts	(Note: 9)		H3		
Material: 2.2 Test Report					
Test report 2.2 acc. EN 10204 of the pressure bearing and process wetted parts				H4	
Connector Type					
Miniature connector M12 x 1 (without mating plug)					U2
Harting Han 8D (8U) - Straight entry	(Note: 10)				U3

Note 1: Suitable for oxygen applications
Note 2: Suitable for food applications
Note 3: With Cable Gland made of Plastic
Note 4: Select connector with additional ordering code
Note 5: Additional options to be ordered by additional ordering code
Note 6: Not available with electrical connection with connector
Note 7: Only available with inert fill
Note 8: Only with Fill Fluid White oil
Note 9: Minor parts with factory certificate acc. EN 10204
Note 10: Only for electrical connection with Harting Han connector

Standard delivery scope (changes possible with additional ordering code)

- For general-purpose applications (no Ex applications)
- No display, no mounting bracket
- English-language operating instructions; English and German-language labels
- Configuration with kPa and °C units
- No test, inspection, or material certificates

Unless otherwise specified prior to manufacture, the customer shall be responsible for the selection of suitable parts that make contact with the medium and appropriate filling fluids in order to ensure compatibility with the relevant process medium.



Castel Maggiore (BO) 40013
Via Lirone 60/i

e-mail: info@eurotecsrl.com
Tel: +39 051/6321595
Website: www.eurotecsrl.com

C.F.: 04103780377
P.I.: 01596581205

—

ABB Ltd.
Measurement & Analytics
Howard Road St. Neots
Cambridgeshire PE19 8EU
UK
Tel: +44 (0)1480 475321
Fax: +44 (0)1480 217948

ABB S.p.A.
Measurement & Analytics
Via Luigi Vaccani 4
22016 Tremezzina (CO)
Italy
Tel: +39 0344 58111

ABB Inc.
Measurement & Analytics
125 E. County Line Road
Warminster PA 18974
USA
Tel: +1 215 674 6000
Fax: +1 215 674 7183

abb.com/measurement

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB.

© Copyright 2018 ABB
All rights reserved

3KXP200004R1001

SS/261GC/AC-EN Rev. H 12.2018